


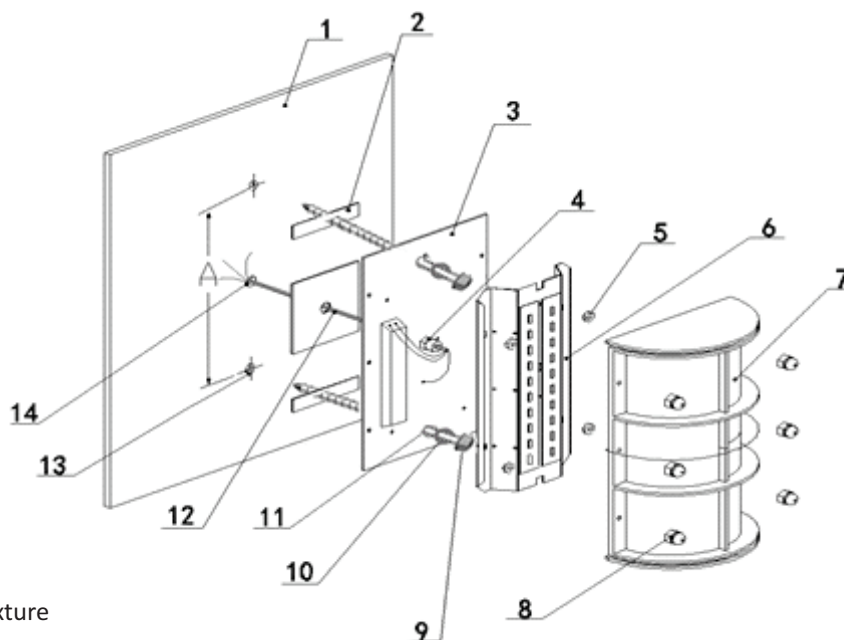

Legend of diagram

1. Mounting plate for the fixture
2. Gasket
3. Base
4. Waterproof Joint
5. Locknut M5 of mounting plate
6. Mounting plate of module
7. Diffuser
8. Installing cup-shape nut of the diffuser plate M6
9. Installation bolt for the lamp #6 3x45mm Hex head Screw
10. O-ring
11. Mounting holes for fixture
12. Power wire (black white and green)
13. Mounting holes to mount the fixture to the surface
14. Outlet holes


Appendix

Model	Space between mounting holes (A)
MCWS-80	424 mm / 16.7 in
MCWS-40	333mm / 13.44 in
MCWS-20	233mm/ 9.2 in

Installation Procedure

1. On a smooth surface drill 3/16 inch mounting holes (according to the appendix above) and proceed to drill outlet holes in the middle of the mounting holes.
2. Remove the diffuser, mounting plate and attached the gasket cushion onto the back of the base.
3. Install the o-ring on the #6 3 x45mm hex screw and use the screw to fix the base onto the mounting surface of the fixture, then turn on the current
4. Put on the mounting plate of module and the diffuser.

Instructions d'installation du modèle Appliques murales extérieures à DEL Monte Carlo

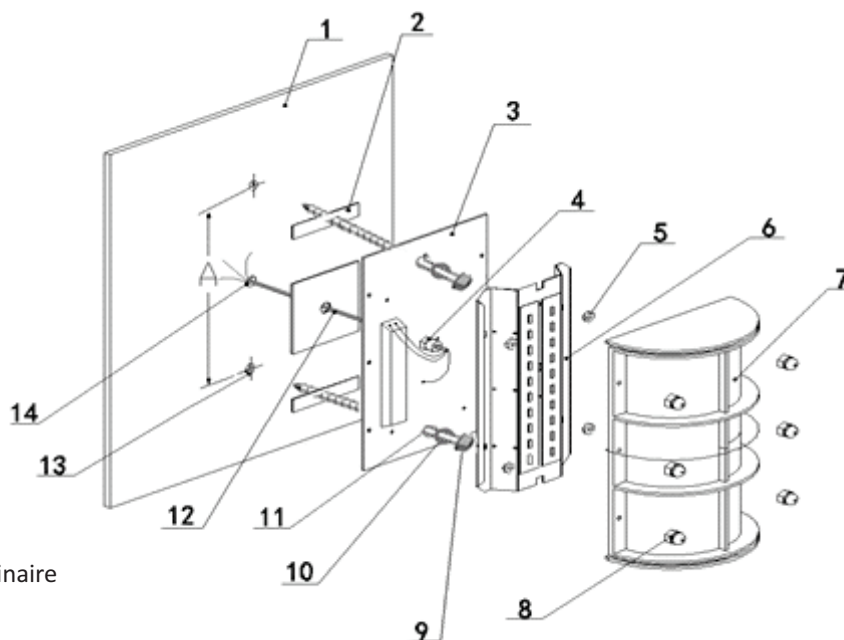

Légende du diagramme

1. Plaque de montage pour le luminaire
2. Joint d'étanchéité
3. Base
4. Joint étanche à l'eau
5. Écrou de blocage M5 de la plaque de montage
6. Plaque de montage du module
7. Diffuseur
8. Écrou d'installation en forme de coupe pour la plaque M6 du diffuseur
9. Boulon d'installation pour la vis à tête hexagonale n° 6 de 3 x 45 mm
10. Joint torique
11. Trous de montage pour le luminaire
12. Fils d'alimentation (noir, blanc et vert)
13. Trous de montage, pour le montage du luminaire sur la surface
14. Trous de sortie

Annexe

Modèle	Espace entre les trous de montage (A)
MCWS-80	424 mm / 16,7 po
MCWS-40	333 mm / 13,44 po
MCWS-20	233 mm / 9,2 po

Procédure d'installation

1. Sur une surface lisse, percer des trous de montage de 3/16 po (conformément à l'annexe ci-dessus), et procéder au perçage des trous de sortie au milieu des trous de montage.
2. Retirer le diffuseur, la plaque de montage et le coussinet de joint d'étanchéité fixé à l'arrière de la base.
3. Installer le joint torique sur la vis hexagonale n° 6 de 3 x 45 mm et utiliser la vis pour fixer la base sur la surface de montage du luminaire, puis rétablir le courant.
4. Placer la plaque de montage du module et le diffuseur.