


Enclosed Steel Housing

DMS

DMSW

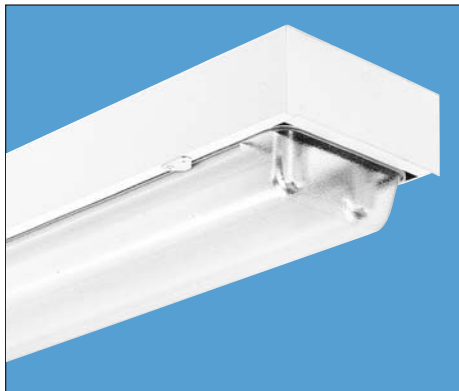

Intended Use

For low to medium mounting heights and harsh environments where dust, dirt, humidity or moisture is present. Ideal for canopies, shipping docks, refrigerated areas and other non-hazardous environments.

Features

Fully gasketed, totally enclosed fixture is available in heavy-duty steel or aluminum housing (AL option) with a baked white enamel finish. A shatter-resistant 15% DR acrylic diffuser (50% DR available) is secured by captive, corrosion-resistant pivot latches.

Ballast – Thermally protected, resetting, Class P, HPF, non-PCB, UL Listed, CSA Certified ballast is standard. Sound rating depends on lamp/ballast combination.

Wiring and Electrical – AWM, TFN or THHN wire used throughout, rated for required temperatures.

Mounting – For unit or row installations, surface or suspended mounting. Wet location DMSW available for covered ceiling mount only.

Listings

UL Listed (standard). CSA Certified or NOM Certified (see Options). Suitable for damp locations. DMSW is listed for wet locations covered ceiling applications.

Ordering Information

Example: **DMS 2 32 MVOLT GEB10IS**

Series	Number of lamps	Lamp type	Diffuser type	Voltage	Options/accessories
DMS Damp location	1	32 32W T8 (48")	(blank) Acrylic, 15% DR	MVOLT	GEB10IS T8 electronic ballast, instant start
DMSW Wet location	2	48HO 60W 800mA (48")	AR High-impact acrylic, 50% DR	347	GEB10RS T8 electronic ballast, rapid start
For tandem double-length unit, add prefix T . Example: TDMS	3¹	48T8HO 44W T8 (48")	DP Deep acrylic, 15% DR ²		AL Aluminum housing
	Not included.	96HO 110W 800mA (96")	ARDP High-impact deep acrylic, 50 DR ²		WLF Field-installable wet location fittings to stem-hang DMS on ½" rigid conduit (2 per package). For factory-installed fittings on top, order WLF as an option.
		96T8 59W T8 slimline (96")			CSA CSA Certified
		96T8HO 86W T8 380mA (96")			NOM NOM Certified
					See page 113 for others.

NOTES:

- 3-lamp models only available with T8 lamp source.
- Deep lens is standard on 4' slimline, HO (800mA) and 8' fixtures. To match deep appearance on 4' rapid start, order **DP** or **ARDP** option.

Availability and Dimensions						
Series	Lamps per cross section	Lamps per fixture	Lamp type	Width in. (cm)	Depth in. (cm)	Length in. (cm)
DMS, DMSW	1, 2, 3 ¹	1, 2, 3	32, 48HO, 48T8HO	8 ⁵ / ₈ (20.9)	5 ¹ / ₄ (13.3) 6 ¹ / ₈ (15.3)	50 ⁷ / ₁₆ (129.4) 50 ⁷ / ₁₆ (129.4)
DMS, DMSW (DP or ARDP)	1, 2, 3 ¹	1, 2, 3	32, 48HO, 48T8HO	8 ⁵ / ₈ (20.9)	6 ¹ / ₈ (15.3)	50 ⁷ / ₁₆ (129.4)
TDMS, TDMSW	1, 2, 3 ¹	2, 4, 6	32, 48HO, 48T8HO	8 ⁵ / ₈ (20.9)	6 ¹ / ₈ (15.3)	98 ⁷ / ₁₆ (251.3)
DMS, DMSW	1, 2	1, 2	96HO, 96T8, 96T8HO	8 ⁵ / ₈ (20.9)	6 ¹ / ₈ (15.3)	98 ⁷ / ₁₆ (251.3)