



FHSCP-UNV-10P-S-SD



Programmable Emergency LED Driver

- Emergency LED Driver
- Universal Voltage: 120-277V~
- Output Voltage Range: 15-55V ---
- Output Current: 55-666mA
- Output Wattage: 3W-10W (Factory default 10W)
- Output Type: LED Class 2, Class 2
- Number of Output Channels: 1 Channel

General Specifications

Input Voltage / Frequency	120-277V~, 50/60Hz
Input Current	0.1A Max
Input Power	5W Max
Standby Input Power	<0.85W
Output Type	LED Class 2, Class 2
Output Power	3W-10W
Voltage Range	15-55V ---
Current Rated	55-666mA
Number of Output Channels	1 Channel
Program Port	I ² C
Input Surge Protection	Line - Neutral 1kV, Line & Neutral - Ground 2kV and 3kV or 6kV Ring Wave
Protections	Output Open Protection Output Overload Protection Output Short Circuit Protection Output Temperature Protection
Emergency Mode	90 Minutes Min
RFI/EMI	FCC Part15A EN55015
Ambient Operating Temperature Rang	10°C To 55°C (50°F To 131°F) (>7W) 0°C To 55°C (32°F To 131°F) (≤7W)
Sound Rating	A
Battery Type	Lithium
Battery Voltage	11.1V
Pack Capacity	2400mAh
Battery Rating	25.92Wh
Battery Count	3 Cells
Battery Recharge Time	12 Hours
Battery Discharge Time	Min 1.5 Hours
Test Switch Remote Mounting Distance	20' (6m) Max.
Service Life	50,000 hours
Warranty	5 years
Safety Standard	UL924, CSA C22.2 No.141-10/cUL EN61347-1, EN61347-2-7, EN62384, EN60598-2-22, EN50172 CEC, MSDS, DGM EEE C62.41.2-2002 EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4 EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN61000-4-29



FHSCP-UNV-10P-S-SD




RoHS
COMPLIANT




Mechanical Data

Overall Dimensions	
Length	16.7" (424.2mm)
Width	1.18" (30mm)
Height	1.0" (25.4mm)

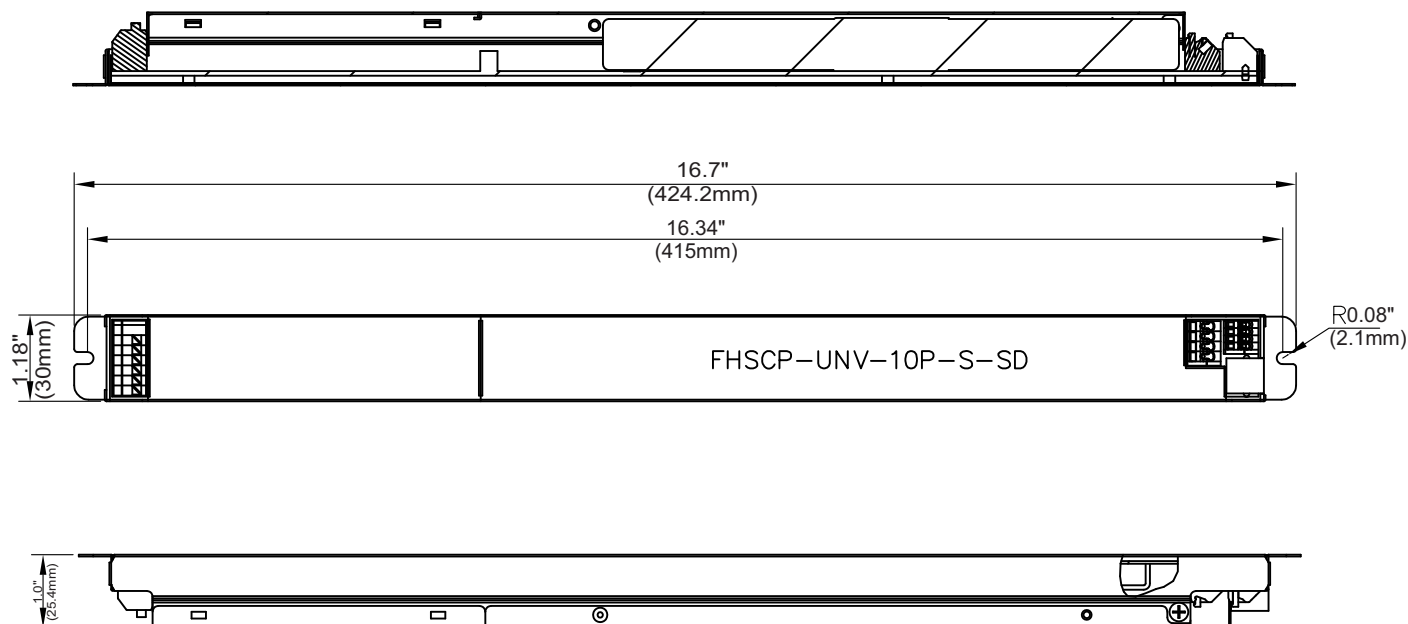


Accessories


Test Switch (Included)

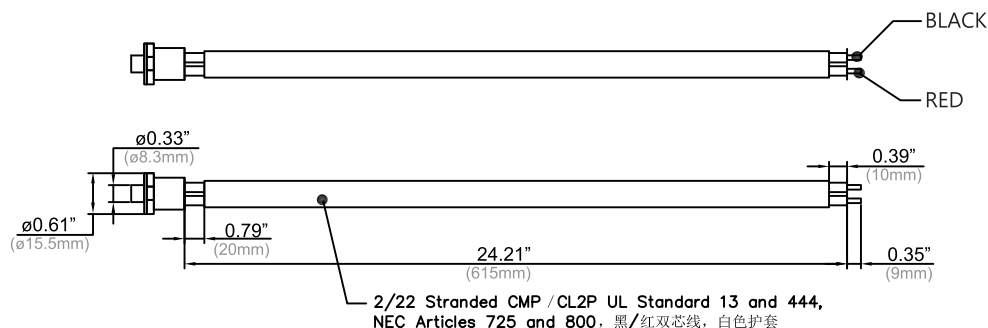

Wet Location Test Switch: FHS-TSTWL-BC (Optional)

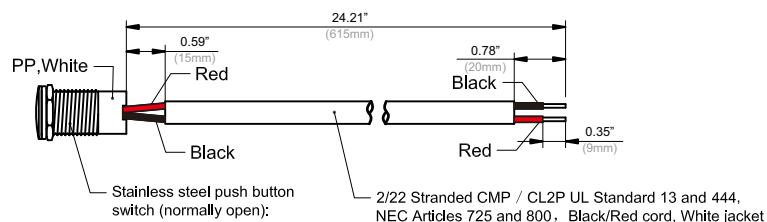


Overall Switch Dimension

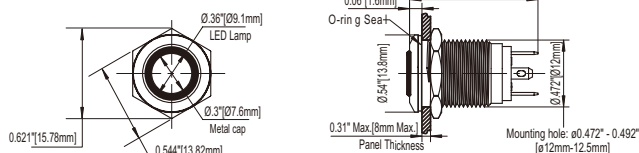

Wall Plate: FHSWLPWH



Wall plate and screw color:
white with black lettering

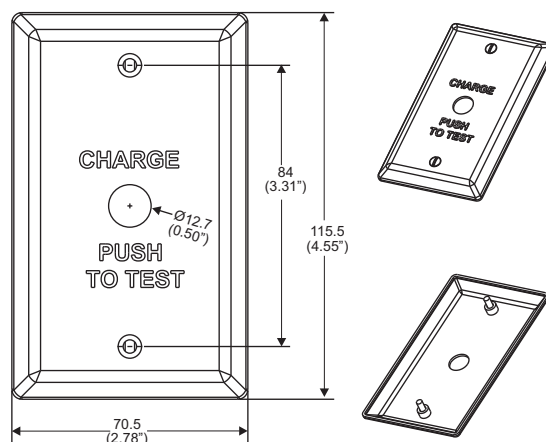

1. "Charge push to Test" plate
2. (2) 6-32 x 1/2" LG mounting screws



**RoHS
COMPLIANT**



UL
LISTED
E477042

The diagram illustrates the electrical connections for the FHSCP-UNV-10P-S-SD module. On the left, the module's input pins are connected to a standard AC power source (UNSWITCHED HOT, NEUTRAL, GROUND) and a switched power source (NEUTRAL, AC DRIVER LINE) controlled by a WALL SWITCH. The module features an I²C interface and control pins (TEST SWITCH, UNIT ENGAGE, LED, AC DRIVER). The module's output is connected to an LED DRIVER, which in turn drives an LED LOAD. The LED DRIVER's output is connected to the LED LOAD's input, which is also connected to the LED DRIVER's output.



FHSCP-UNV-10P-S-SD



RoHS
COMPLIANT

BC

CE



SELF-DIAGNOSTIC INSTRUCTIONS / OPERATION:

If the self-diagnostic feature is enabled:

The emergency LED driver will conduct a self-check for thirty(30)seconds every thirty(30)days; and a ninety(90) minutes self-check every 12 months. After every self-check the LED indicator light will indicate a status signal. Check indicator status chart above to diagnose the status signal.

If the self-diagnostic feature is disabled:

User must conduct a manual test every thirty (30) days to ensure the emergency LED light source illuminates as intended. A full discharge test shall be conducted once a year; the LED light source shall illuminate for a minimum of ninety (90) minutes.

***Self-Diagnostic feature is factory enabled**

TEST SWITCH INDICATOR STATUS:

LED Indicators Status	EM Driver Status / Mode
 Solid Green	System OK / AC OK (Self-Diagnostic Enabled or Disabled)
 Slow Flashing Red, 4s on / 1s off	Battery NOT detected, check battery switch or connection
 Flashing Red, 1s on / 1s off	Battery Failure, replace battery
 Flashing Green, 1s on / 1s off	Self-Diagnostic test underway
 Fast Flashing Red, 0.1s on / 0.1s off	Abnormal driver performance, replace driver
 Slow Flashing Green, 0.1s on / 3s off	Normal working in EM mode
 Solid Red	No load or output over voltage protection triggered , Check LED connection
 Slow Flashing Red, 0.5s on / 0.5s off	Charge circuit failure replace driver

TEST SWITCH OPERATIONS

EM Test:

Press and hold the test button (>1s) to enter EM mode in normal AC powered.

Manual Self-Diagnostic:

After charging twelve (12) hours or battery fully charged, quickly press the test button three(3) times within two (2) seconds to force the controller to enter Self-Diagnostic cycle. To quit the Self-Diagnostic cycle after engaged, press and hold the test button for ten (10) seconds.

Enable/Disable Self-Diagnostic Status:

Fast click 2 times within 2s to query the Self-Diagnostic Enabled/Disabled status. The indicator would blink for current status for 3 cycles. 2.5s ON/0.5s OFF stands for Enabled. 0.5s ON/2.5sOFF stands for Disabled.

Load Test:

When the test button is flashing red 4s on/4s off, press and hold the test switch for 10s, the unit will enter Self -Diagnostic mode.



RoHS
COMPLIANT



Programming:

Unless otherwise programmed the output will self-program to the maximum rating of the battery. This EM driver can be programmed using the Fulham SmartSet TPSB-100(E). Programming features include the following:

- * Output EM power - 3W to 10W
- * Enable / Disable Self-Diagnostic



* For more detailed programming instructions please see our Programming Instructions and Design Guide found on our website:

- <https://www.fulham.com/PDFs/SpecSheets/Fulham-Design-Guide-Programmable-Drivers.pdf>



FHSCP-UNV-10P-S-SD



Guidelines

Grounding

- Driver must be grounded by means of the Driver case.

Over temperature protection

- The Fulham Hotspot Plus LED drivers are protected against thermal overload. If the temperature limit is exceeded, the output current is reduced.

LED load

- Fulham Hotspot Plus LED drivers are designed to drive passive LEDs, -COB's and -LED assemblies Proper function is not guaranteed when (LED) loads with active components are used.

Mounting / Cooling

- Above an output power of 20W, the driver needs to be mounted on a heat conductive surface of at least 200cm². Always test if the surface is sufficient enough before installing the driver.

Short-circuit protection

- In case of a short circuit the LED driver switches to protection mode. After the removal of the short-circuit the LED driver will recover automatically.

No-load Operation

- In no-load operation the output voltage will not exceed the specified open circuit output voltage.

Hot Swapping

- This driver does not support hot swapping of the LEDs

Remote Mounting

- Up to 15ft with 18AWG. Contact Fulham for higher remote distance.

Battery Maintenance

- In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.

Warranty

- Reference Fulham's limited Warranty: <https://cdn.fulham.com/PDFs/Limited-Warranty.pdf>



FHSCP-UNV-10P-S-SD



Part Number Matrix

FHS

LED Driver

FHS = Fire Horse EM Driver

CP

Output Type

CP= Constant Current

UNV

Input Voltage

UNV= 120V-277V

10

Power

10= 10W

P

Characteristic

P= Programmable

S

Case Type

S= Stick

SD

Special Features

SD= Self Diagnostic


Product Image: LED Driver

FHSCP-UNV-10P-S-SD



Packaging

Master Carton

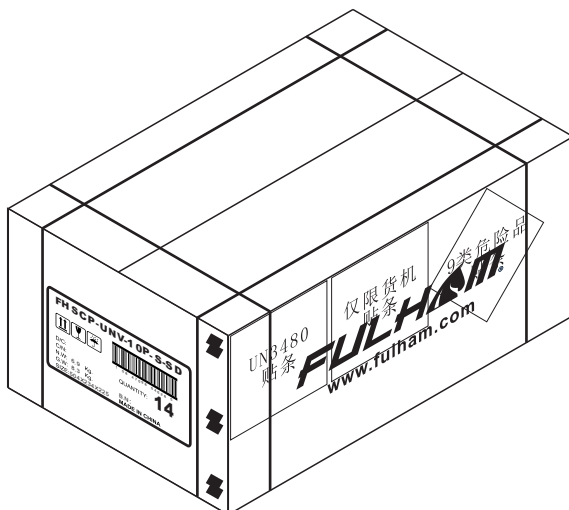

OUTER DIMENSION

L	W	H
19.84" (504mm)	9.21" (234mm)	8.86" (225mm)
Net Weight	Gross Weight	QUANTITY
15.21lbs. (6.9kg.)	18.30lbs. (8.3kg)	14pcs.