



Package Contents



LED Slim Downlight



J-Box Driver



Wire Connectors




Template


Wafer Installation

HOLE SIZE

4 inch: Ø4-1/4" (Ø108mm)
6 inch: Ø6-1/6" (Ø159mm)




Copper—G
White—N
Black—L



5CCT


☒ 2700K
☒ 3000K
☒ 3500K
☒ 4000K
☒ 5000K




1 Create a cutout of the appropriate diameter using the template or the table above.

2 Open the J-Box cover and remove the knockout(s) on the side panel. Insert the supply cable using appropriate cable clamps (not included) if necessary. Connect the supply wires to the Wafer wires using the 3 connectors.


3 Select your desired lamp color with the CCT Switch.

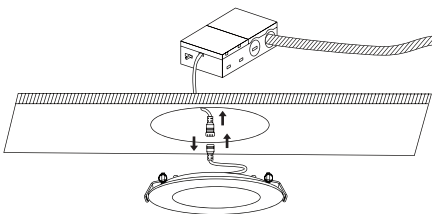

4 Insert J-Box through the mounting hole and secure it. Connect the Wafer's power cable to the J-Box.

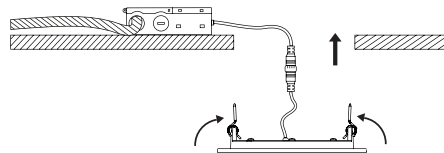

5 Push the spring-loaded clips upwards while inserting the fixture into the mounting hole. Release the clips and the fixture will be pulled flush into the ceiling.



6 Turn on the power and confirm the fixture functions properly.

WARNING

1. Read all installation instructions before beginning. If you have any doubts about how to install this lighting fixture, or if the fixture fails to operate completely, consult a qualified electrician to ensure correct branch circuit conductor.
2. This fixture is designed for use in a circuit protected by a fuse or circuit breaker.
3. Always be sure that power supply is turned off at fuse box or circuit breaker before installing, cleaning, or servicing the fixture.
4. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.