



Date:	Project Name:
Type:	Part Number:



T8 TYPE B ECO



FEATURES

- Built-in safety switch prevents electrical shock during installation
- Operates directly on 120-277V line voltage
- Compatible with shunted and non-shunted lamp holders
- Rated for use in fully enclosed fixtures.
- Suitable for use in dry and damp locations
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)
- CRI >83
- Rated Lifetime L70(hrs): >50,000
- Reno LED T8 lamps conform to UL 1598 Standard
- 5 year warranty

APPLICATIONS

- Commercial applications
- Office Lighting
- Residential




Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BASE TYPE	BEAM ANGLE	CCT (K)
R41132	WLL-LEDT8BP9.5/835-ECO	9.5W	4FT	120-277V	1600 lm	G13	330°	3500K
R41133	WLL-LEDT8BP9.5/840-ECO	9.5W	4FT	120-277V	1600 lm	G13	330°	4000K
R41130	WLL-LEDT8BP12/840-ECO	12W	4FT	120-277V	1800 lm	G13	330°	4000K
R41131	WLL-LEDT8BP12/850-ECO	12W	4FT	120-277V	1800 lm	G13	330°	5000K


DIMENSIONS

4FT

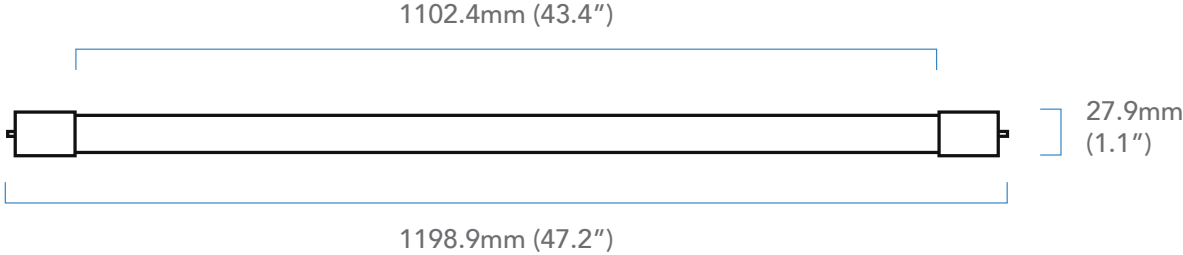


PROTECTION FEATURES

INTERNAL SAFETY SWITCH

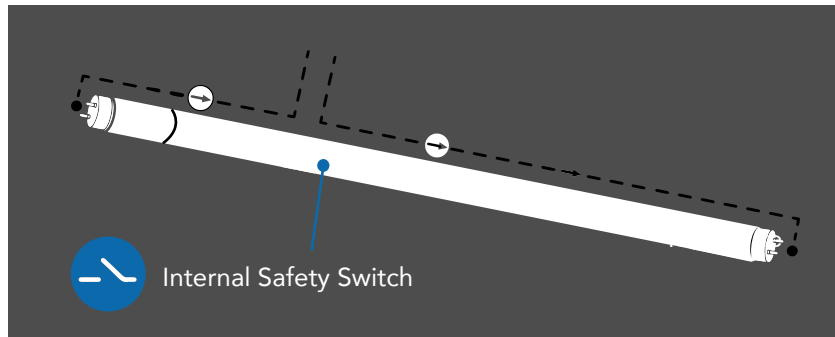

Internal Safety Switch for installation protection.
 (No current will flow until pins on both ends are engaged)

MISUSE PROTECTED FUNCTION

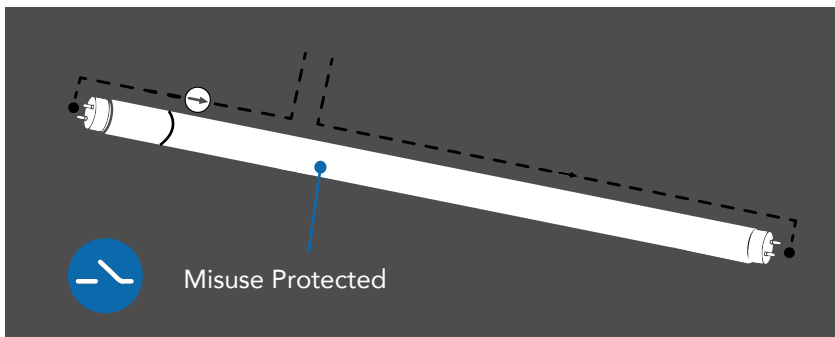


Misuse - Protected function if forgot to by-pass the ballast, the lamp won't work, no risk of fire or cap melting.

DOUBLE-ENDED WIRING DIAGRAM

- Cut all existing connections to ballast as shown below and remove ballast.
 See Figure A above for typical ballast configurations.
- Re-wire fixture as shown below. For Double-ended wiring, use either shunted or nonshunted lampholders.

Note: There should not be any exposed wires at the end of installation.

Shunted Lampholders

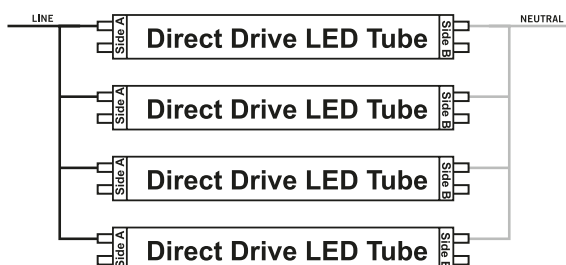

Nonshunted Lampholders

