



GET YOUR PRODUCTS FAST

Arani is committed to same day shipping on orders before 3pm (EST)*.

GFCI OUTLETS

TAMPER-RESISTANT | AUTO SELF-TESTING



SPECIFICATIONS

Auto Self-Testing

Polycarbonate Body with Copper Contacts

Rated Voltage: 125VAC 60Hz

Tripping Threshold: 5mA

Tripping Time: <25ms

Surge Current:

6000V / 3000A 6000V / 10KA

Electric Strength:

Pressure Resistance 1500V 60Hz 1min

Insulation Resistance: >50MQ (DC500V)

Short-Circuit Current: 10KA

Functioning Temperature: -35°C to 66°C

AVAILABILITY

White

15A / 20A



This is a STOCK item:

Look for our Same Day Shipping icon for all products that ship out on the same day (orders must be placed before 3pm EST)

ORDERING INFORMATION

Date:

Project:

Prepared for:

Type:

Comments:



GFCI Outlets



GFCI Outlet (Front View)





GF1-xxA-TR-WH-V1



GFCI Outlet (Side View)

GF1-xxA-TR-WH-V1

DIMENSIONS

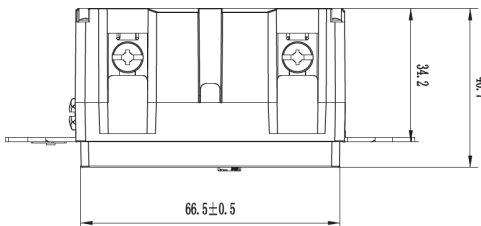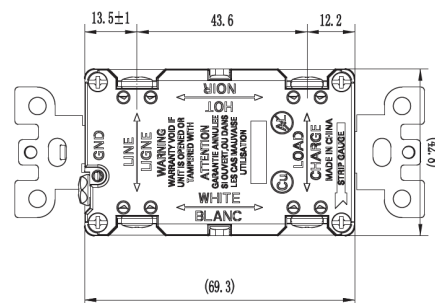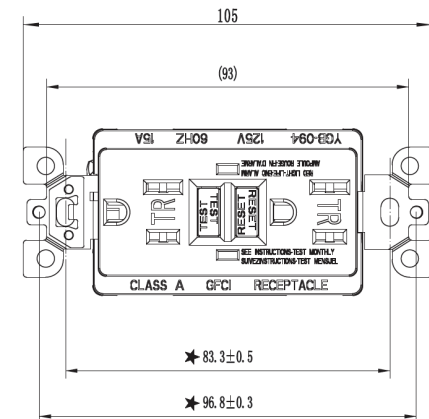

SERIES	FINISH	RATED WORKING CURRENT	ORDERING CODE
TAMPER-RESISTANT GFCI OUTLETS	WHITE	15A	GF1-15A-TR-WH-V1
		20A	GF1-20A-TR-WH-V1



ARANI.CA — 2555 LEGER STREET,
LASALLE, QC H8N 2V9, CANADA