

TAMPER-RESISTANT OUTLETS

QUICK-INSTALL BRACKETS



SPECIFICATIONS

Polycarbonate Body with Copper Contacts
Rated Power: 1875W
Rated Voltage: 125VAC 60Hz
Withstand Voltage: 1500VAC
Fire Rating of Rubber Shell: UL94 V2
Functioning Temperature: -20°C to 60°C

AVAILABILITY

White
15A / 20A

This is a STOCK item:
Look for our Same Day Shipping icon for all products that ship out on the same day (orders must be placed before 3pm EST)

ORDERING INFORMATION




Outlet (Front View)
OU1-xxA-TR-WH-V1



Outlet (Back View)
OU1-xxA-TR-WH-V1

QUICK INSTALL BRACKETS
Allows up to 2 wires to be inserted at each screw, without the need for looping the wires around the screw.

DIMENSIONS

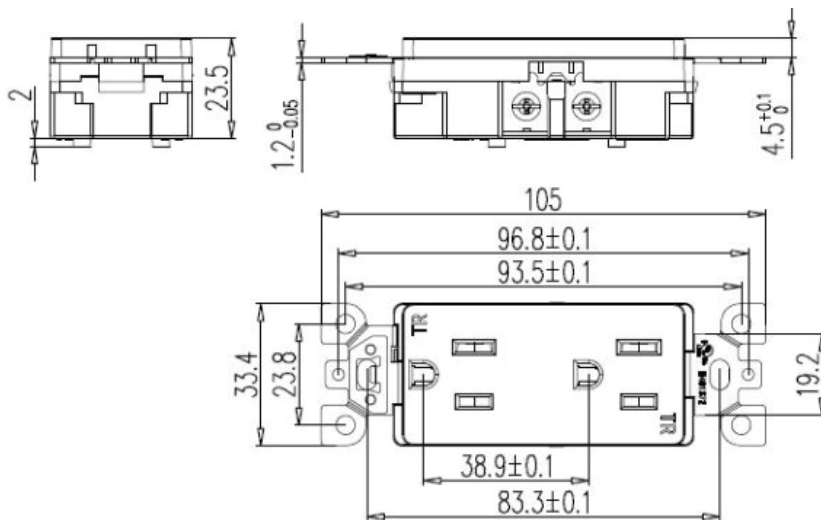

SERIES	FINISH	RATED WORKING CURRENT	ORDERING CODE
TAMPER-RESISTANT OUTLETS	WHITE	15A	OU1-15A-TR-WH-V1
		20A	OU1-20A-TR-WH-V1