


Date:	Project:
Prepared for:	Type:
Comments:	

8FT LED VAPOR TIGHT FIXTURE

VT96-65W-110W-VAR-V4

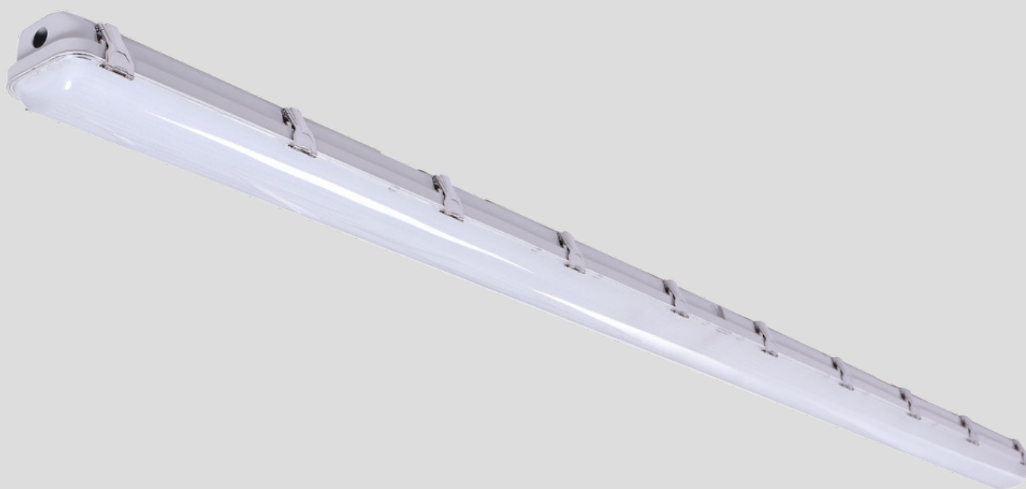

IP66

NEMA 4X

IK10



PERFORMANCE SPECIFICATIONS

Input Voltage	120-347Vac
Power	110W/90W/75W/65W
Equivalent Power	400W
Input Current	1.1A
Lumens (Up to)	15400lm at 110W / 12600lm at 90W / 10500lm at 75W / 9100lm at 65W
Color Temp	3500K/4000K/5000K (Color Selectable)
Efficacy	140lm/W
Color Rendering Index (CRI)	+80
Lifetime	50,000 hours
Dimming	0-10V dimming
Total Harmonic Distortion	<15%
Surge Protection	2.5KV
Operating Temperature	-40°C to +40°C
Total Harmonic Distortion	<15%

PHYSICAL SPECIFICATIONS

Dimensions	2360mm x 108mm x 83.9mm
Net Weight	13.4lbs (6.07 kg)
Beam Angle	120°
Build Material	Polycarbonate (lens and body) , Stainless Steel latches.
Environment	Wet



ORDERING SPECIFICATIONS

Model Number	VPT0110W-8VTADHV14P3CK-V4A
Years of Warranty	5 years
Certification and Compliances	cETLus , DLC premium , NEMA 4X , IP66 , IK10 , NSF

ORDERING INFORMATION:

 Stock item. Same Day Shipping for orders placed by 3pm EST

SERIES	INPUT VOLTAGE	POWER (WATTS)	LUMENS	COLOR TEMPERATURE (SELECTABLE)	DLC PRODUCT ID	ORDERING CODE
8' VAPOR TIGHT FIXTURE	120-347Vac	110W/90W/ 75W/65W	15400lm @ 110W	3500K/4000K/5000K	S-F804BG S-Y8F0ND S-RD360W	VT96-65W-110W-VAR-V4 

ADDITIONAL ACCESSORIES (sold separately)

Suspension Mounting kit



VT-AC-S


Motion Sensor




LS48-MWS-V1

PHOTOMETRIC REPORT

Polar Candela Distribution

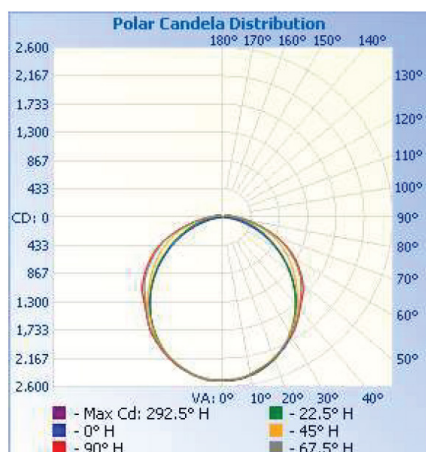

Illuminance at distance

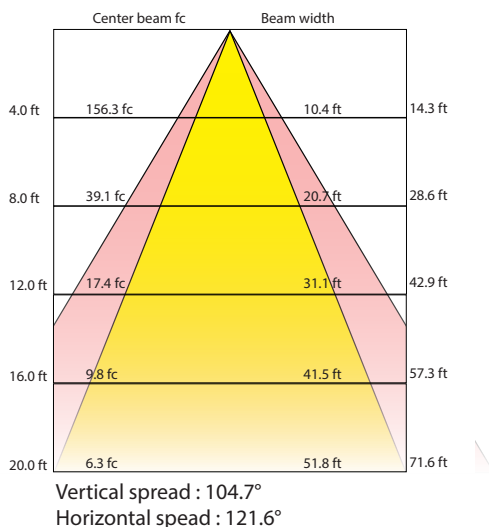

Zonal Lumen Summary

Zone	Lumens	Luminaire %
0-30	3,875.3	25.3%
0-40	6,316.5	41.3%
0-60	11,151.7	72.9%
60-90	3,596.7	23.5%
70-100	2,005.6	13.1%
90-120	466.8	3.1%
0-90	14,748.4	96.5%
90-180	542.0	3.5%
0-180	15,290.4	100%

DIMENSIONS:

