



FLUORESCENT LIGHTING

FL-6ES
08/10

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) / 1-800-567-2513 (French) / Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:



Blade
Screwdriver



Pliers



Hammer




Wiring supplies
as required by
electrical code


SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. THIS FIXTURE IS DESIGNED FOR 120 VOLT CIRCUIT. IF UNSURE ABOUT WIRING, CONSULT AN ELECTRICIAN.
WARNING: DO NOT CONNECT FIXTURE TO DIMMER CIRCUIT.
4. USE ONLY ENERGY STAR APPROVED BALLAST (WITH LAMP SOCKETS) MANUFACTURED BY CSA FILE NUMBER 226237 AND MARKED BY CANARM LIMITED. THIS BALLAST IS REPLACEABLE BY A QUALIFIED ELECTRICIAN WITHOUT CUTTING OF THE WIRES.

INSTALLATION:




1. Release the screws and starwashers. Push the sockets in place according to the wiring diagram on the fixture.



2. Reattach the wire cover.

Diagram A


Wood Screw

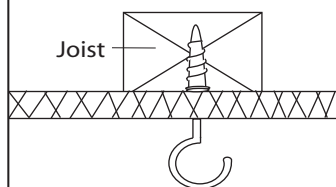


3. Secure the two open screw eyehooks (provided) to the ceiling 42 1/2" apart. Secure directly to a joist or using toggle bolts (not included). See diagram A.

Toggle Bolt


toggle bolt

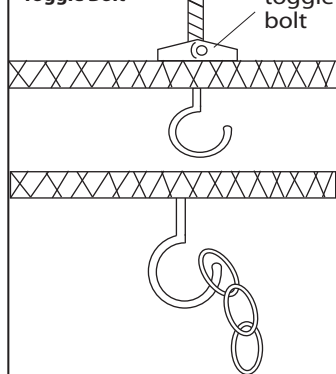


4. Attach the mounting chains (provided) to the open screw eye hooks.

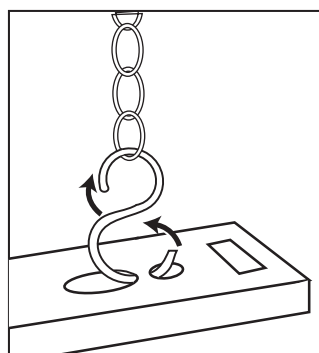

5. Attach the mounting chains into the dual slots that are located on top of the fixture housing. Crimp the screw eye hooks closed using pliers.

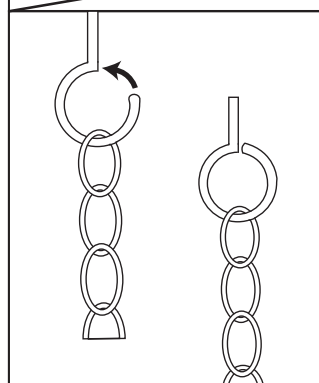

6. Level the fixture by adjusting the length of the chain at the open screw eye hooks. Crimp the screw eye hooks closed using pliers.

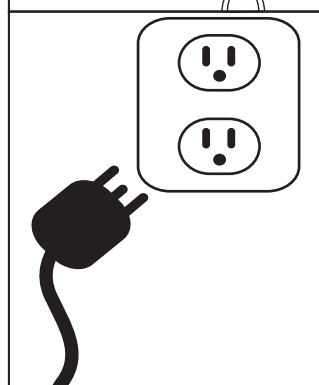

7. Install proper bulb type and wattage (not included). Insert the pins on both ends of the fluorescent tube into the lamp holders on both ends. Rotate the tube until a slight "click" is felt. Repeat for additional bulbs.

8. Plug cord into a grounded 120V, 60 Hz outlet.

9. When the ballast is replaced, reverse the process from step 8 and 2. Loosen the screw and nut to remove the ballast and sockets from fixture. After that repeat the normal process from step 2 and 8.