
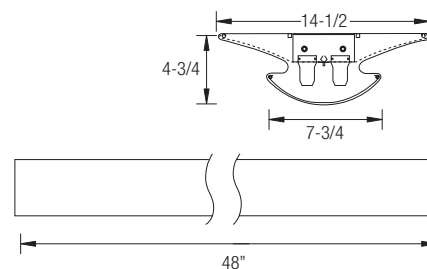


### T8/T5 LINEAR FLUORESCENT DIRECT/INDIRECT (SUSPEND MOUNT)

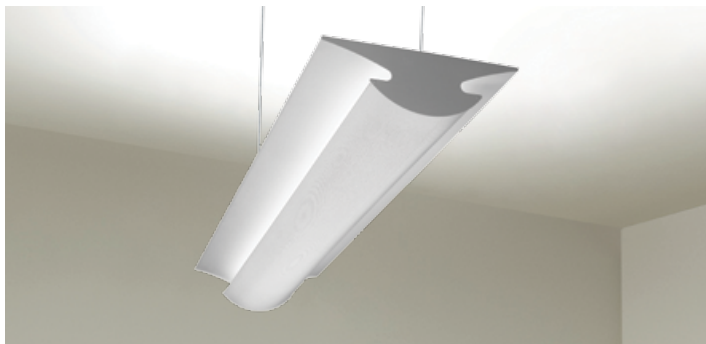

#### APPLICATION:

- Open office lighting for low brightness glare-free working environments • Retail low ceiling applications
- Wide gull wing reflector design to direct uniform light distribution • Perforated metal basket and overlay provides a soft downlight contribution

#### PRODUCT FEATURES:

- Housing made from die-formed heavy-gauge pre-painted cold-rolled steel
- Perforated basket is made of cold-rolled steel with 5/64" diameter micro-perforations at staggered 7/64" intervals
- Hinged basket for quick easy lamp access
- Overlay diffuser is made of .020 white opal acrylic
- Finished in a white polyester paint with a minimum of 82% reflectivity
- Available in a variety of lamp configurations
- Suitable for damp location
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

#### LISTING

UL/C-UL listed to US and Canadian standard

#### WARRANTY

Guaranteed for one year against mechanical defects

T8/T5  
OB4DI

### Ordering Information > Example: 4-OB4DI-1-32-T8-ADV-10-MVOLT-EMG-T8-BX-700

| 4            | OB4DI                                                     |                                                                                                                                                                                                                                                                                                                                  |                                                                            |                                                     |                                                                           |  |  |
|--------------|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------------------------|--|--|
| FIXTURE SIZE | SERIES                                                    | WATTAGE                                                                                                                                                                                                                                                                                                                          | VOLTAGE <sup>1</sup>                                                       | # OF BALLAST                                        | BALLAST FACTOR                                                            |  |  |
| 4 - 4'       | OB4DI-<br>Oracle Linear<br>Fluorescent<br>Direct/Indirect | <b>1-28-T5</b> (1 lamp/28W/T5)<br><b>2-28-T5</b> (2 lamps/28W/T5)<br><b>3-28-T5</b> (3 lamps/28W/T5)<br><b>1-54-T5HO</b> (1 lamp/54W/T5HO)<br><b>2-54-T5HO</b> (2 lamps/54W/T5HO)<br><b>3-54-T5HO</b> (3 lamps/54W/T5HO)<br><b>1-32-T8</b> (1 lamp/32W/T8)<br><b>2-32-T8</b> (2 lamps/32W/T8)<br><b>3-32-T8</b> (3 lamps/32W/T8) | <b>(Blank)</b> - MVOLT (120/277)<br><b>120</b><br><b>277</b><br><b>347</b> | <b>(Blank)</b> - 1 Ballast<br><b>2</b> - 2 Ballasts | <b>(Blank)</b> - Normal BF<br><b>HBF</b> - High BF<br><b>LBF</b> - Low BF |  |  |

| BALLAST CONFIGURATION & CODE |                |                 |                                           |
|------------------------------|----------------|-----------------|-------------------------------------------|
| 32W/T8                       | 28W/T5         | 54W/T5HO        | DESCRIPTION                               |
| <b>(Blank)</b>               | -              | -               | Electronic Instant Start                  |
| <b>EPS</b>                   | <b>(Blank)</b> | <b>(Blank)</b>  | Electronic Program Start                  |
| <b>ADV-7</b>                 | -              | <b>ADV-7</b>    | Advance Mark-7 <sup>1</sup>               |
| <b>ADV-10</b>                | -              | <b>ADV-10</b>   | Advance Mark-10 <sup>1</sup>              |
| -                            | <b>ADV-OPT</b> | -               | Advance Optanium <sup>1</sup>             |
| <b>ADV-ESS</b>               | -              | -               | Advance Essential <sup>1</sup>            |
| <b>ADV-ROVR</b>              | -              | <b>ADV-ROVR</b> | Advance Rover <sup>1</sup>                |
| <b>LUT-EHD</b>               | <b>LUT-EHD</b> | <b>LUT-EHD</b>  | Lutron Ecosystem H-Series <sup>1</sup>    |
| <b>LUT-2W</b>                | -              | -               | Lutron Tu-Wire <sup>1</sup>               |
| <b>LUT-EC5</b>               | <b>LUT-EC5</b> | -               | Lutron Ecosystem <sup>1</sup>             |
| <b>LUT-EC3</b>               | <b>LUT-EC3</b> | <b>LUT-EC3</b>  | Lutron Eco-10 <sup>1</sup>                |
| <b>LUT-TVE</b>               | -              | -               | Lutron Tve <sup>1</sup>                   |
| <b>LUT-H3D</b>               | <b>LUT-H3D</b> | <b>LUT-H3D</b>  | Lutron Hi-Lume 3D <sup>1</sup>            |
| -                            | -              | <b>LUT-ECD</b>  | Lutron Ecosystem (347V Only) <sup>1</sup> |

<sup>1</sup> - Voltage must be specified for dimming ballast.

| EMERGENCY BATTERY PACK OPTIONS (L = LUMENS) |                                                                              |
|---------------------------------------------|------------------------------------------------------------------------------|
| ORDER CODE                                  | DESCRIPTION                                                                  |
| <b>EMG-T8-BX-450</b>                        | Up to 450 L. for <b>T8</b> or <b>BX</b>                                      |
| <b>EMG-T8-BX-600</b>                        | Up to 600 L. for <b>T8</b> or <b>BX</b>                                      |
| <b>EMG-T8-BX-700</b>                        | Up to 700 L. for <b>T8</b> or <b>BX</b>                                      |
| <b>EMG-T8-BX-1400</b>                       | Up to 1400 L. for <b>T8</b> or <b>BX</b>                                     |
| <b>EMG-T5-T5HO-700</b>                      | Up to 700 L. for <b>T5</b> or <b>T5HO</b>                                    |
| <b>EMG-T5-T5HO-1300</b>                     | Up to 1300 L. for <b>T5</b> or <b>T5HO</b>                                   |
| <b>EMG-SD-T8-BX-T5-T5HO-1400</b>            | Self-Diagnostic 1400 L. for <b>T8</b> , <b>BX</b> , <b>T5</b> or <b>T5HO</b> |
| <b>EMG-ICE-T8-BX-T5-T5HO-1400</b>           | ICE Pack 1400 L. for <b>T8</b> , <b>BX</b> , <b>T5</b> or <b>T5HO</b>        |
| <b>GTD</b>                                  | Generator Transfer Device                                                    |

| WIRING OPTIONS |                                 |
|----------------|---------------------------------|
| <b>FBF</b>     | - Internal Fast Blow Fuse       |
| <b>SBF</b>     | - Internal Slow-Blow Fuse       |
| <b>RIS</b>     | - Radio Interference Suppressor |

| OTHER OPTIONS |                              |
|---------------|------------------------------|
| <b>INMS</b>   | - Motion Sensor              |
| <b>USA</b>    | - Made in America Compliance |