

Bravado HZ Remote

Die-cast Aluminum Remote



Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____



MECHANICAL SPECIFICATIONS


The **BRAVADO HZ** is constructed from a durable, fully gasketed NEMA 4X and IP66 rated die-cast aluminum housing. Stainless steel mounting straps are supplied for surface mounting. The **BRAVADO HZ** is supplied standard in a durable gray powder coat, baked finish. Other colours are available, including colour matching, please specify. CSA 22.2 No. 141-15 Performance Certified.

ORDERING INFORMATION

Series	Operation	Lamp Type	Options
BRV-HZ-R	6 (Volt DC)	See lamp Selection	CC (Custom colour mounting plate)
	12 (Volt DC)		WG (Wireguard)
	24 (Volt DC)		

EXAMPLE: BRV-HZ-R-24-MR1612W DESCRIPTION: Bravado Remote, 24V, 12W MR16 lamps

DIMENSIONS (MM, IN)

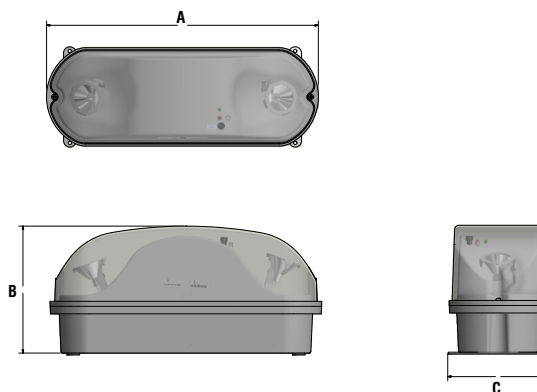

Series	A	B	C
BRV-HZ-R	413mm	191mm	152mm
	16 1/4"	7 1/2"	6"

INSTALLATION

The **BRAVADO HZ** remote is suitable for hazardous location surface wall and ceiling mounting. Suitable for NEMA 4X and IP66 installations, Class I, Division 2, Groups A-D and Class II, Divisions 1 & 2, Groups E-G, Class I, Zone 2, IIC, T4.



REMOTES

TECHNICAL cCSAus Certified

SANITATION LISTED (SL)

The **BRAVADO** is sanitation listing approved. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation, electrical safety and performance standards of food service environments.

TAMPER RESISTANT DESIGN

The **BRAVADO** series of vandal resistant emergency lighting units are designed to stand up to abuse in applications such as schools, public areas, institutions and apartment complexes where vandalism may potentially occur. The heavy die-cast aluminum body and polycarbonate lens offer extreme protection and superior performance. Tamper resistant screws are standard and ensure the integrity of the unit.

LAMP SELECTION

	6V	12V	24V	120V
LED-MR16	5, 7W	2, 5, 7W	5, 7W	N/A
MR16	N/A	20, 35, 50W	N/A	N/A
LED-GU10	N/A	N/A	N/A	7W

TEMPERATURE CODES

Temperature Codes Class I, Div. 2						
Lamp	10 Watt Halogen	12 Watt Halogen	20 Watt Halogen	35 Watt Halogen	50 Watt Halogen	7 watt LED max
T Code	T3A	T3B	T2D	T2A	T1	T4A
Temperature Codes Class 2, Div. 1 & 2						
Lamp	10 Watt Halogen	12 Watt Halogen	20 Watt Halogen	35 Watt Halogen	50 Watt Halogen	7 watt LED max
T Code	T4A	T4A	T4A	T4A	T4A	T4A