

Forma RM Die-cast Aluminum Running Man

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall, ceiling or
end mounting



Die-cast aluminum
housing

High-output LED
technology


AC Only, Self-Powered
or Universal DC



EXTERNAL SPECIFICATIONS

The **FORMA** series is constructed from durable die-cast aluminum. The **FORMA** comes standard with a brushed aluminum faceplate(s) and black housing. Available in custom epoxy-based powder coat finishes (please specify). Universal mounting pattern is stamped into the back plate. The self-powered LED version comes standard with an external LED status indicator and test switch.

DIMENSIONS (MM, IN.)

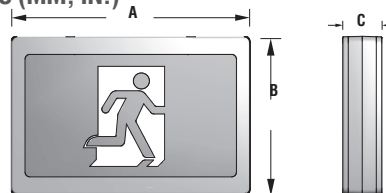

Series	A	B	C
FM-RM	324mm	216mm	57mm
	12 3/4"	8 1/2"	2 1/4"

ORDERING INFORMATION

Series	Operation	Light Source	Face#	Pictogram	Mounting	Options
FM-RM	Blank (AC only)	L (LED)	1 (Single)	OLR (Universal pictograms)	W (Wall mount, no canopy)	WW (White face, white body)
	SP (Self-powered)		*2 (Double)	0 (No indicators)	M (Universal mount, wall, ceiling or end)	BB (Black face, black body)
			**U (Universal)	L (Left indicator)		CC (custom colour - specify)
				R (Right indicator)		BA (Brushed aluminum body)
				D (Down indicator)		AT (Auto-test, SP only)
				U (Up indicator)		WG (Wireguard)
				UR (45° up right)		TP (Tamper proof screws)
				DR (45° down right)		PK12 (12" pendant kit)
				UL (45° up left)		UDC (6 - 24VDC)
				DL (45° down left)		90SP (90 minute emergency)
						120SP (120 minute emergency)
						DL (Damp Location)
						SW-OL (RM no indicator, left)

NOTE: *Two pictograms or OLR must be ordered - specify **Specify OLR pictogram

EXAMPLE: FM-RM-SP-L-R-1-OLR-W

DESCRIPTION: Forma die-cast aluminum, 120/347VAC input, self-powered, LED, single face, universal pictogram, wall mount

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology and 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. CSA 22.2 No. 141-15 Performance Certified.

DIE-CAST DESIGN

The excellent visual performance and an architecturally pleasing design makes the **FORMA** series the premier choice for applications requiring the durability and the craftsmanship of die-cast aluminum signs. The standard brushed aluminum face blends well with any setting and provides a clean, modern look. The die-cast aluminum construction provides the **FORMA** with exceptional strength and rigidity.

ELECTRICAL SPECIFICATIONS

The **FORMA** series is configured with a high-output LED light source. Standard with 120/347VAC input. All versions consume only 2W nominal power. Optional UDC emergency illumination is provided by the LED light source at the following wattages: 6VDC - 24VDC - 2 watts. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

MECHANICAL SPECIFICATIONS

The **FORMA** is constructed from durable die-cast aluminum. Universal mounting pattern is stamped on the back. The **FORMA** is supplied standard with a brushed aluminum face(s) and a black baked powder coat finished housing. Other colours are available, including custom colour matching, please specify. The faceplate is held securely in place with a screw and a pivot bracket system that allows for complete access to the interior of the sign.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

**FACE OPTIONS**

When ordering a single face, choose one pictogram option. When ordering a double face, choose 2 pictogram options.

INSTALLATION

The **FORMA** is suitable for ceiling, wall and end mounting. Suitable for indoor installations.