


NL-3410

3" Square Round

35° Adjustable

TRIM DIMENSIONS

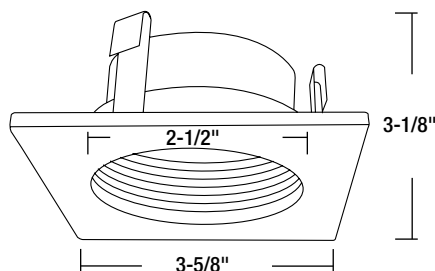

Width/Length: 3-5/8" Height: 1-3/4" Aperture: 1-1/2"

FEATURES

Trim

3" die cast aluminum flange provides sharp clean corners. Non-reflective painted finishes and square trim. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°.

Mounting

Trim includes three trim clips that securely mount trim in housing.

Compatible Housings

Compatible with Line Voltage and Low Voltage housings.

Lamp

IMPORTANT: DO NOT USE GLASS LENS (PROVIDED) WHEN ALREADY USING LAMP WITH GLASS COVER

Low Voltage: 20-50W MR16, VERSA 3-50W 12 MR16 LED, or Halogen MR16

Line Voltage: 50W Max 120V MR16 GU10 or LED

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.



3" Square Pinhole Trim

NL-3410BB: 3" Square Round, Black Reflector, Black Flange

NL-3410BW: 3" Square Round, Black Reflector, White Flange

NL-3410BZ: 3" Square Round, Bronze Reflector, Bronze Flange

NL-3410NN: 3" Square Round, Natural Metal Reflector, Natural Metal Flange

NL-3410WW: 3" Square Round, White Reflector, White Flange

Type

Project

Catalog No.

Lamp/Wattage

Compatible Housings

LOW VOLTAGE

New Construction IC Housing

NLIC-301QAT/20 3" IC Air-Tight Low Voltage Housing, 20W Max, 120V Magnetic

NLIC-301QAT/37 3" IC Air-Tight Low Voltage Housing, 37W Max, 120V Magnetic

NLIC-301QAT 3" IC Air-Tight Low Voltage Housing, 50W Max, 120V Magnetic

NLIC-301AT/1EL 3" IC Air-Tight Low Voltage Housing, LED Compatible 3-50W 120V Electronic

NLIC-301AT/(lamp)* 3" IC Air-Tight Low Voltage Housing with LED Lamp

New Construction Non-IC Housing

NL-301QAT/20 3" Air-Tight Low Voltage Quick Connect Housing, 20W Max, 120V Magnetic

NL-301QAT/37 3" Air-Tight Low Voltage Quick Connect Housing, 37W Max, 120V Magnetic

NL-301QAT 3" Air-Tight Low Voltage Quick Connect Housing, 50W Max, 120V Magnetic

NL-301AT/1EL 3" Air-Tight LV Quick Connect Housing, LED Compatible 3-50W 120V Electronic

NL-301AT/(lamp)* 3" Air-Tight Low Voltage Quick Connect Housing with LED Lamp

Remodel Non-IC Housing

NLR-304QAT/20 3" Air-Tight Low Voltage Remodel Housing, 20W Max, 120V Magnetic

NLR-304QAT/37 3" Air-Tight Low Voltage Remodel Housing, 37W Max, 120V Magnetic

NLR-304QAT 3" Air-Tight Low Voltage Remodel Housing, 50W Max, 120V Magnetic

NLR-304AT/1EL 3" Air-Tight LV Remodel Housing, LED Compatible 3-50W 120V Electronic

NLR-304AT/(lamp)* 3" Air-Tight Low Voltage Remodel Housing with LED Lamp

Remodel Non-IC Housing for Remote Transformer

NLR-305AT/20 3" Air-Tight Remodel Housing for Remote Transformer, 20W Max

NLR-304QAT/37 3" Air-Tight Remodel Housing for Remote Transformer, 37W Max

NLR-304QAT 3" Air-Tight Remodel Housing for Remote Transformer, 50W Max

*MR16 LED Lamp Option

/E01 LED MR16 7Watt 27K Spot (25°) 50 Watt Equall

/E02 LED MR16 7Watt 27K Flood (35°) 50 Watt Equall

/E03 LED MR16 7Watt 30K Spot (25°) 50 Watt Equall

/E04 LED MR16 7Watt 30K Flood (35°) 50 Watt Equall

LINE VOLTAGE

Double Wall New Construction IC Housing

NHIC-350AT 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 50W Max

NHIC-350AT/20 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 20W Max

NHIC-350AT/10 3" IC Air-Tight Quick Connect Double Wall MR16 120V GU10 Housing, 10W Max

New Construction Non-IC Housing

NH-350AT 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 50W Max

NH-350AT/20 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 20W Max

NH-350AT/10 3" Air-Tight Quick Connect New Construction MR16 120V GU10 Housing, 10W Max

Remodel Non-IC Housing

NHR-354AT 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 50W Max

NHR-354AT/20 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 20W Max

NHR-354AT/10 3" Air-Tight Quick Connect Remodel MR16 120V GU10 Housing, 10W Max