

NL-412 / NL-413 / NL-414 / NL-416 / NL-452 / NL-453

4" Adjustable Reflector with Ring

FEATURES

Trim: Precision spun 0.050 aluminum high grade reflector. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°. Separate trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.

Mounting: Trim includes three trim clips that securely mount trim in housing.

COMPATIBLE HOUSINGS

Compatible with Line Voltage and Low Voltage housings. See individual specification sheets for more information.

COMPATIBLE LAMP / HOUSINGS

Low Voltage:

20W MR16 max. (NL-401QAT/20; NLIC-401QSAT/20; NLR-404QAT/20; NLR-405AT/20; NLIC-402SAT/20; NL-402S/20; NLR-403S/20)
37W MR16 max. (NL-401QAT/37; NLIC-401QSAT/37; NLR-404QAT/37; NLR-405AT/37; NLIC-402QSAT/37; NL-402S/37; NLR-403S/37)
50W MR16 max. (NLIC-401AT/1EL; NLIC-401AT/2EL; NLIC-401QSAT; NL-401AT/1EL; NL-401AT/2EL; NL-401QAT; NLR-404AT/1EL;
NLR-404AT/2EL; NLR-404QAT; NLR-405AT; NLIC-402AT/1EL; NLIC-402QSAT; NL-402S/1EL; NL-402S; NLR-403S/1EL; NLR-403S)
75W MR16 max. (NL-401/75/1EL; NL-401/75/2EL; NL-401/75; NLR-404/75/1EL; NLR-404/75/2EL; NLR-404/75)

Line Voltage:

20W MR16 max. (NSEIC-407AT/20; NSERIC-407AT/20)
25W MR16 max. (NFBIC-401AT/25A)
50W MR16 GU10 max. (NSL-401AT/10; NSLIC-401AT/10; NSLR-404AT/10)

IMPORTANT: DO NOT USE GLASS LENS (PROVIDED) WHEN ALREADY USING LAMP WITH GLASS COVER

LABELS AND LISTINGS

cULus Listed for Damp Location when used with compatible housing.



4" Adjustable Reflector with Ring

Catalog No.

- NL-412 = Specular Gold Reflector with White Metal Ring
- NL-413 = Specular Black Reflector with White Metal Ring
- NL-413B = Specular Black Reflector with Black Metal Ring
- NL-414 = Specular Clear Reflector with White Metal Ring
- NL-414C = Specular Clear Reflector with Chrome Metal Ring
- NL-414HZ = Haze Reflector with White Metal Ring
- NL-416 = White Reflector with White Metal Ring
- NL-452 = Natural Metal Reflector with Natural Metal Ring
- NL-453 = Copper Reflector with Copper Metal Ring
- NL-453BZ = Bronze Reflector with Bronze Metal Ring

Example: NL-412 = Specular Gold Reflector with White Metal Ring


Type

Project

Catalog No.

Notes

PRODUCT IMAGES AND DIMENSIONS

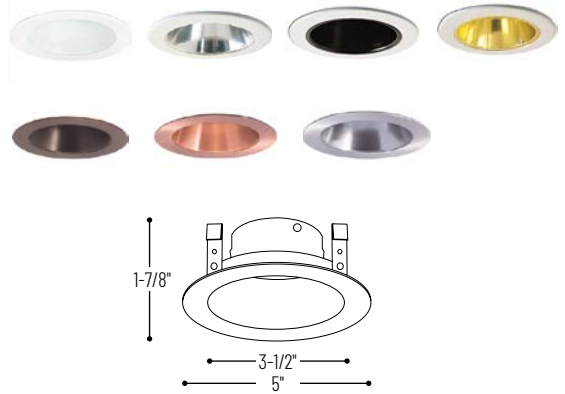

Compatible Housings

Catalog No.

Low Voltage

NLIC-401QSAT/20 = ICAT New Construction / 120V Magnetic / 20W
NLIC-401QSAT/37 = ICAT New Construction / 120V Magnetic / 37W
NLIC-401QSAT = ICAT New Construction / 120V Magnetic / 50W
NLIC-401AT/1EL = ICAT New Construction / 120V Electronic / 50W
NLIC-401AT/2EL = ICAT New Construction / 120V Electronic / 50W

NL-401QAT/20 = Non-IC AT New Construction / 120V Magnetic / 20W
NL-401QAT/37 = Non-IC AT New Construction / 120V Magnetic / 37W
NL-401QAT = Non-IC AT New Construction / 120V Magnetic / 50W
NL-401/75 = Non-IC New Const. / 120V Magnetic / 75W
NL-401AT/1EL = Non-IC AT New Construction / 120V Electronic / 50W
NL-401AT/2EL = Non-IC AT New Construction / 277V Electronic / 50W
NL-401/75/1EL = Non-IC New Construction / 120V Electronic / 75W
NL-401/75/2EL = Non-IC New Construction / 277V Electronic / 75W

NLIC-402QSAT/20 = ICAT Shallow New Construction / 120V Magnetic / 20W
NLIC-402QSAT/37 = ICAT Shallow New Construction / 120V Magnetic / 37W
NLIC-402QSAT = ICAT Shallow New Construction / 120V Magnetic / 50W
NLIC-402AT/1EL = ICAT Shallow New Construction / 120V Electronic / 50W

NL-402S/20 = Non-IC Shallow New Construction / 120V Magnetic / 20W
NL-402S/37 = Non-IC Shallow New Construction / 120V Magnetic / 37W
NL-402S = Non-IC Shallow New Construction / 120V Magnetic / 50W
NL-402S/1EL = Non-IC Shallow New Construction / 120V Electronic / 50W

NLR-403S/20 = Non-IC Shallow Remodel / 120V Magnetic / 20W
NLR-403S/37 = Non-IC Shallow Remodel / 120V Magnetic / 37W
NLR-403S = Non-IC Shallow Remodel / 120V Magnetic / 50W
NLR-403S/1EL = Non-IC Shallow Remodel / 120V Electronic / 50W

NLR-404QAT/20 = Non-IC AT Remodel / 120V Magnetic / 20W
NLR-404QAT/37 = Non-IC AT Remodel / 120V Magnetic / 37W
NLR-404QAT = Non-IC AT Remodel / 120V Magnetic / 50W
NLR-404/75 = Non-IC Remodel / 120V Magnetic / 75W
NLR-404AT/1EL = Non-IC AT Remodel / 120V Electronic / 50W
NLR-404AT/2EL = Non-IC AT Remodel / 277V Electronic / 50W
NLR-404/75/1EL = Non-IC Remodel / 120V Electronic / 75W
NLR-404/75/2EL = Non-IC Remodel / 277V Electronic / 75W

NLR-405AT/20 = Non-IC AT Remodel / No Transformer / 20W
NLR-405AT/37 = Non-IC AT Remodel / No Transformer / 37W
NLR-405AT = Non-IC AT Remodel / No Transformer / 50W

Line Voltage

NSEIC-407AT/20 = ICAT LED New Construction / 20W
NSERIC-407AT/20 = ICAT LED Remodel / 20W

NFBIC-401AT/25A = Fire Rated IC Air-Tight New Construction / 25W

NSLIC-401AT/10 = ICAT New Construction / 50W
NSL-401AT/10 = Non-IC Air-Tight New Construction / 50W
NSLR-404AT/10 = Non-IC Air-Tight Remodel / 50W