

NL-465

4" Surface Adjustable

FEATURES

Trim: Metal trim with adjustable ring can be adjusted up to 43°. Adjustable ring allows lamp to be mounted on top of the trim. Trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.

Mounting: Trim includes three trim clips that securely mounts inside the housing.

COMPATIBLE LAMP / HOUSINGS

Low Voltage:

20W MR16 max. (NL-401QAT/20; NLIC-401QSAT/20; NLR-404QAT/20; NLR-405AT/20; NLIC-402SAT/20; NL-402S/20; NLR-403S/20)
37W MR16 max. (NL-401QAT/37; NLIC-401QSAT/37; NLR-404QAT/37; NLR-405AT/37; NLIC-402QSAT/37; NL-402S/37; NLR-403S/37)
50W MR16 max. (NLIC-401AT/1EL; NLIC-401AT/2EL; NLIC-401QSAT; NL-401AT/1EL; NL-401AT/2EL; NL-401QAT; NLR-404AT/1EL; NLR-404AT/2EL; NLR-404QAT; NLR-405AT; NLIC-402AT/1EL; NLIC-402QSAT; NL-402S/1EL; NL-402S; NLR-403S/1EL; NLR-403S)
75W MR16 max. (NL-401/75/1EL; NL-401/75/2EL; NL-401/75; NLR-404/75/1EL; NLR-404/75/2EL; NLR-404/75)

Line Voltage:

20W MR16 max. (NSEIC-407AT/20; NSERIC-407AT/20)
25W MR16 max. (NFBIC-401AT/25A)
50W MR16 GU10 max. (NSL-401AT/10; NSLIC-401AT/10; NSLR-404AT/10)

OPTIONAL ACCESSORIES:

NM-100B/MR16: Blue Lens/Filter
NM-100C/MR16: Clear Lens/Filter (included with NL-465)
NM-100F/MR16: Frosted Lens/Filter
NM-100G/MR16: Green Lens/Filter
NM-100L/MR16: Linear Lens/Filter
NM-100R/MR16: Red Lens/Filter
NM-100S/MR16: Spread Lens/Filter
NM-100Y/MR16: Yellow Lens/Filter
NT-350B: Black Accessory Snoot

IMPORTANT: DO NOT USE GLASS LENS WHEN ALREADY USING LAMP W/ GLASS COVER

LISTING

cULus Listed for Damp Locations when used with compatible housing



4" Surface Adjustable

Catalog No.

NL-465B = 4" Black Surface Adjustable with Black Ring
NL-465BZ = 4" Bronze Surface Adjustable with Bronze Ring
NL-465C = 4" Chrome Surface Adjustable with Chrome Ring
NL-465CO = 4" Copper Surface Adjustable with Copper Ring
NL-465G = 4" Gold Surface Adjustable with Gold Ring
NL-465N = 4" Natural Metal Surface Adjustable with Natural Metal Ring
NL-465W = 4" White Surface Adjustable with White Ring


Type

Project

Catalog No.

Notes

PRODUCT IMAGES AND DIMENSIONS

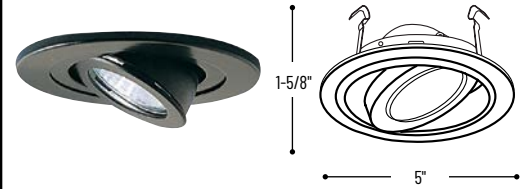

Compatible Housings

Catalog No.

Low Voltage

NLIC-401QSAT/20 = ICAT New Construction / 120V Magnetic / 20W
NLIC-401QSAT/37 = ICAT New Construction / 120V Magnetic / 37W
NLIC-401QSAT = ICAT New Construction / 120V Magnetic / 50W
NLIC-401AT/1EL = ICAT New Construction / 120V Electronic / 50W
NLIC-401AT/2EL = ICAT New Construction / 120V Electronic / 50W
NL-401QAT/20 = Non-IC AT New Construction / 120V Magnetic / 20W
NL-401QAT/37 = Non-IC AT New Construction / 120V Magnetic / 37W
NL-401QAT = Non-IC AT New Construction / 120V Magnetic / 50W
NL-401/75 = Non-IC New Const. / 120V Magnetic / 75W
NL-401AT/1EL = Non-IC AT New Construction / 120V Electronic / 50W
NL-401AT/2EL = Non-IC AT New Construction / 277V Electronic / 50W
NL-401/75/1EL = Non-IC New Construction / 120V Electronic / 75W
NL-401/75/2EL = Non-IC New Construction / 277V Electronic / 75W
NLIC-402QSAT/20 = ICAT Shallow New Construction / 120V Magnetic / 20W
NLIC-402QSAT/37 = ICAT Shallow New Construction / 120V Magnetic / 37W
NLIC-402QSAT = ICAT Shallow New Construction / 120V Magnetic / 50W
NLIC-402AT/1EL = ICAT Shallow New Construction / 120V Electronic / 50W
NL-402S/20 = Non-IC Shallow New Construction / 120V Magnetic / 20W
NL-402S/37 = Non-IC Shallow New Construction / 120V Magnetic / 37W
NL-402S = Non-IC Shallow New Construction / 120V Magnetic / 50W
NL-402S/1EL = Non-IC Shallow New Construction / 120V Electronic / 50W
NLR-403S/20 = Non-IC Shallow Remodel / 120V Magnetic / 20W
NLR-403S/37 = Non-IC Shallow Remodel / 120V Magnetic / 37W
NLR-403S = Non-IC Shallow Remodel / 120V Magnetic / 50W
NLR-403S/1EL = Non-IC Shallow Remodel / 120V Electronic / 50W
NLR-404QAT/20 = Non-IC AT Remodel / 120V Magnetic / 20W
NLR-404QAT/37 = Non-IC AT Remodel / 120V Magnetic / 37W
NLR-404QAT = Non-IC AT Remodel / 120V Magnetic / 50W
NLR-404/75 = Non-IC Remodel / 120V Magnetic / 75W
NLR-404AT/1EL = Non-IC AT Remodel / 120V Electronic / 50W
NLR-404AT/2EL = Non-IC AT Remodel / 277V Electronic / 50W
NLR-404/75/1EL = Non-IC Remodel / 120V Electronic / 75W
NLR-404/75/2EL = Non-IC Remodel / 277V Electronic / 75W
NLR-405AT/20 = Non-IC AT Remodel / No Transformer / 20W
NLR-405AT/37 = Non-IC AT Remodel / No Transformer / 37W
NLR-405AT = Non-IC AT Remodel / No Transformer / 50W

Line Voltage

NSEIC-407AT/20 = ICAT LED New Construction / 20W
NSERIC-407AT/20 = ICAT LED Remodel / 20W
NFBIC-401AT/25A = Fire Rated IC Air-Tight New Construction / 25W
NSLIC-401AT/10 = ICAT New Construction / 50W
NSL-401AT/10 = Non-IC Air-Tight New Construction / 50W
NSLR-404AT/10 = Non-IC Air-Tight Remodel / 50W

Example: **NL-465B** = 4" Black Surface Adjustable with Black Ring