

NL-4810

4" Adjustable Stepped Baffle with Square Trim

FEATURES

Trim: Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare. Nonreflective painted finishes and square trim. Gimbal ring allows lamp to be mounted on top of the trim and adjustable up to 35°.

Mounting: Trim includes three trim clips that securely mount trim in housing.

COMPATIBLE HOUSINGS

Compatible with Line Voltage and Low Voltage housings. See individual specification sheets for more information.

COMPATIBLE LAMP / HOUSINGS

Low Voltage:

20W MR16 max. (NL-401QAT/20; NLIC-401QSAT/20; NLR-404QAT/20; NLR-405AT/20; NLIC-402SAT/20; NL-402S/20; NLR-403S/20)
37W MR16 max. (NL-401QAT/37; NLIC-401QSAT/37; NLR-404QAT/37; NLR-405AT/37; NLIC-402QSAT/37; NL-402S/37; NLR-403S/37)
50W MR16 max. (NLIC-401AT/1EL; NLIC-401AT/2EL; NLIC-401QSAT; NL-401AT/1EL; NL-401AT/2EL; NL-401QAT; NLR-404AT/1EL;
NLR-404AT/2EL; NLR-404QAT; NLR-405AT; NLIC-402AT/1EL; NLIC-402QSAT; NL-402S/1EL; NL-402S; NLR-403S/1EL; NLR-403S)
75W MR16 max. (NL-401/75/1EL; NL-401/75/2EL; NL-401/75; NLR-404/75/1EL; NLR-404/75/2EL; NLR-404/75)

Line Voltage:

20W MR16 max. (NSEIC-407AT/20; NSERIC-407AT/20)
25W MR16 max. (NFBIC-401AT/25A)
50W MR16 GU10 max. (NSL-401AT/10; NSLIC-401AT/10; NSLR-404AT/10)

IMPORTANT: DO NOT USE GLASS LENS WHEN ALREADY USING LAMP WITH GLASS COVER

LISTINGS

cULus Listed for Damp Locations



4" Adjustable Stepped Baffle with Square Trim

Catalog No.

- NL-4810BB = 4" Black Adjustable Stepped Baffle with Black Square Trim
- NL-4810BW = 4" Black Adjustable Stepped Baffle with White Square Trim
- NL-4810BZBZ = 4" Bronze Adjustable Stepped Baffle with Bronze Square Trim
- NL-4810COCO = 4" Copper Adjustable Stepped Baffle with Copper Square Trim
- NL-4810NN = 4" Natural Metal Adjustable Stepped Baffle with Natural Metal Square Trim
- NL-4810WN = 4" White Adjustable Stepped Baffle with Natural Metal Square Trim
- NL-4810WW = 4" White Adjustable Stepped Baffle with White Square Trim


Type

Project

Catalog No.

Notes

PRODUCT IMAGES AND DIMENSIONS

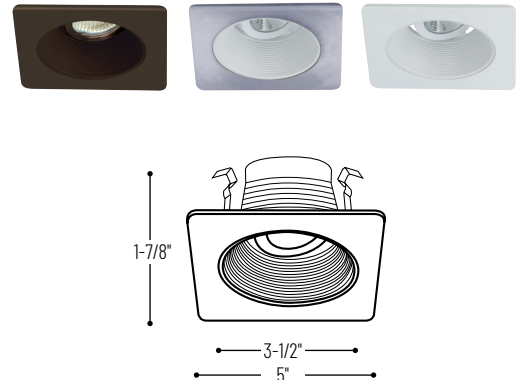

Compatible Housings

Catalog No.

Low Voltage

- NLIC-401QSAT/20 = ICAT New Construction / 120V Magnetic / 20W
- NLIC-401QSAT/37 = ICAT New Construction / 120V Magnetic / 37W
- NLIC-401QSAT = ICAT New Construction / 120V Magnetic / 50W
- NLIC-401AT/1EL = ICAT New Construction / 120V Electronic / 50W
- NLIC-401AT/2EL = ICAT New Construction / 120V Electronic / 50W
- NL-401QAT/20 = Non-IC AT New Construction / 120V Magnetic / 20W
- NL-401QAT/37 = Non-IC AT New Construction / 120V Magnetic / 37W
- NL-401QAT = Non-IC AT New Construction / 120V Magnetic / 50W
- NL-401/75 = Non-IC New Const. / 120V Magnetic / 75W
- NL-401AT/1EL = Non-IC AT New Construction / 120V Electronic / 50W
- NL-401AT/2EL = Non-IC AT New Construction / 277V Electronic / 50W
- NL-401/75/1EL = Non-IC New Construction / 120V Electronic / 75W
- NL-401/75/2EL = Non-IC New Construction / 277V Electronic / 75W
- NLIC-402QSAT/20 = ICAT Shallow New Construction / 120V Magnetic / 20W
- NLIC-402QSAT/37 = ICAT Shallow New Construction / 120V Magnetic / 37W
- NLIC-402QSAT = ICAT Shallow New Construction / 120V Magnetic / 50W
- NLIC-402AT/1EL = ICAT Shallow New Construction / 120V Electronic / 50W
- NL-402S/20 = Non-IC Shallow New Construction / 120V Magnetic / 20W
- NL-402S/37 = Non-IC Shallow New Construction / 120V Magnetic / 37W
- NL-402S = Non-IC Shallow New Construction / 120V Magnetic / 50W
- NL-402S/1EL = Non-IC Shallow New Construction / 120V Electronic / 50W
- NLR-403S/20 = Non-IC Shallow Remodel / 120V Magnetic / 20W
- NLR-403S/37 = Non-IC Shallow Remodel / 120V Magnetic / 37W
- NLR-403S = Non-IC Shallow Remodel / 120V Magnetic / 50W
- NLR-403S/1EL = Non-IC Shallow Remodel / 120V Electronic / 50W
- NLR-404QAT/20 = Non-IC AT Remodel / 120V Magnetic / 20W
- NLR-404QAT/37 = Non-IC AT Remodel / 120V Magnetic / 37W
- NLR-404QAT = Non-IC AT Remodel / 120V Magnetic / 50W
- NLR-404/75 = Non-IC Remodel / 120V Magnetic / 75W
- NLR-404AT/1EL = Non-IC AT Remodel / 120V Electronic / 50W
- NLR-404AT/2EL = Non-IC AT Remodel / 277V Electronic / 50W
- NLR-404/75/1EL = Non-IC Remodel / 120V Electronic / 75W
- NLR-404/75/2EL = Non-IC Remodel / 277V Electronic / 75W
- NLR-405AT/20 = Non-IC AT Remodel / No Transformer / 20W
- NLR-405AT/37 = Non-IC AT Remodel / No Transformer / 37W
- NLR-405AT = Non-IC AT Remodel / No Transformer / 50W

Line Voltage

- NSEIC-407AT/20 = ICAT LED New Construction / 20W
- NSERIC-407AT/20 = ICAT LED Remodel / 20W
- NFBIC-401AT/25A = Fire Rated IC Air-Tight New Construction / 25W
- NSLIC-401AT/10 = ICAT New Construction / 50W
- NSL-401AT/10 = Non-IC Air-Tight New Construction / 50W
- NSLR-404AT/10 = Non-IC Air-Tight Remodel / 50W

Example: NL-4810WW = 4" White Adjustable Stepped Baffle with White Square Trim