

Quadra Recessed RM Extruded Aluminum LED Running Man

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall mount
recessed mounting

High-output LED
technology



Extruded aluminum frame

AC Only or UDC



EXTERNAL SPECIFICATIONS

The **QUADRA RECESSED** series face is constructed from durable aluminum. The **QUADRA RECESSED** comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Universal mounting pattern and key hole slots are stamped into the backplate. The self-powered version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY and AC/DC: comes standard configured with high-output LED technology and 120/347VAC input. Solid state charger and transfer. CSA 22.2 No. 141-15 Performance Certified.


ORDERING INFORMATION

Series	Operation	Light Source	Face #	Pictogram	Mounting	Options
QRR-RM	Blank (AC only)	L (LED)	1 (Single)	OLR (Universal pictograms)	W (Wall mount - recessed)	CC (Custom colour - specify)
				O (No indicators)		BA (Brushed aluminum finish)
				L (Left indicator)		TP (Tamper proof screw)
				R (Right indicator)		SW (Special wording - specify)
				D (Down indicator)		WG (Wireguard)
				U (Up indicator)		UDC (Universal 6 - 24VDC)
				UR (45° up right)		AN (Anodized finish)
				DR (45° down right)		AT (Auto-test, SP only)
				UL (45° up left)		SW-OL (RM no indicator, left)
				DL (45° down left)		

EXAMPLE: QRR-RM-SP-L-R-1-W-UL

DESCRIPTION: Quadra Recessed, 120/347VAC input, AC only, single face, pictogram with 45° up left indicator & wall mounting

DIMENSIONS (MM, IN.)

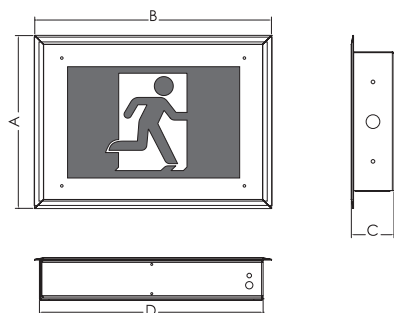

Series	A	B	C	D
QRR-RM	241mm	362mm	57mm	311mm
	9 1/2"	14 1/4"	2 1/4"	12 1/4"

EXTRUDED DESIGN

The clean lines and thin design of the **QUADRA RECESSED** series provides it with a modern and attractive appearance. Steel forms a rigid and durable enclosure that can be securely mounted in any application.

ELECTRICAL SPECIFICATIONS

The **QUADRA RECESSED** series is configured with high-output LED lamps and consumes only 2W nominal power. Optional emergency illumination is provided by the LED light source at the following wattage:
6VDC - 24VDC, 2 watts

If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

MECHANICAL SPECIFICATIONS

The **QUADRA** is constructed of sturdy 20 gauge steel. Universal mounting pattern and key hole slots are stamped on the backplate and steel angle brackets. Surface mount conduit entry knockouts are also provided. The **QUADRA** is supplied standard with an attractive and durable white, baked powder coat finish. Other colours are available, including custom colour matching, please specify. The pictogram is held securely in place with 4 screws.

INSTALLATION

The **QUADRA RECESSED** is suitable for recessed wall mounting. Suitable for indoor installations.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

