

NX-615-LED
Die-Cast LED Exit Signs with Battery Backup and Self Diagnostic
Source: 2W

Type
Project
Catalog No.
Notes

PRODUCT DESCRIPTION
Nora Lighting's compact, low profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years-saving greatly on maintenance and upkeep costs. Nora Lighting's LED exits are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

Die-cast exit sign utilizing Light Emitting Diode (LED) modules as the primary light source for economy operation. Exit sign includes a backup NiCad battery for 90 minute operation under emergency applications where primary power source has been interrupted or terminated.

ELECTRICAL
Voltage: 120V or 277V dual input
Wattage: 2W
Light Source: LED
Operating Temp: 10°C to 40°C (50°F to 104°F)
Circuitry Protection: Short circuit protection. Brown-out protection.

Construction: Brushed, die-cast aluminum, low profile, snap-together housing constructed of 20 gauge steel. Snap-out knock-outs for wiring.

Face: Two front faces sent with dual face unit, One face plate sent with single face unit. 6" high text with color diffusion.

Mounting: Exit sign can be mounted on a wall, side or ceiling mounted (all mounting hardware included).


Battery: Replaceable Ni-Cad battery (NED-NICAD2) offers 90 minute emergency operation on fully charged battery.

Self Diagnostic: Automatically monitors and tests to ensure proper operation. Self tests one minute each month, thirty minutes every six months and ninety minutes annually.

- LABELS AND LISTINGS
• UL Listed
• NFPA / NFPA-101
• NEC
• 5-year warranty on material and workmanship



PRODUCT IMAGES AND DIMENSIONS

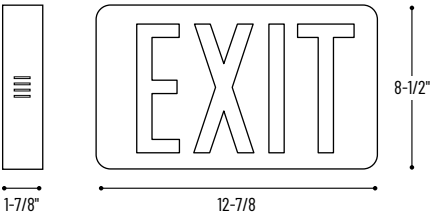

Die-Cast LED Exit Signs with Battery Backup and Self Diagnostic

Table with 4 columns: Catalog No., Letter Color, Faces, Housing Color. Row 1: NX-615-LED, R = 6" Red Letters, (blank) = Single Face, (blank) = Black Housing. Row 2: G = 6" Green Letters, /2F = Double Faces.

Example: NX-615-LEDR = 6" Red Letters Die-Cast LED Exit Sign with Battery Backup and Self Diagnostic, Single Face, Black Housing