

SEA Remote NEMA 4X Remote Head in 6, 12 or 24V



Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____



EXTERNAL SPECIFICATIONS

The **SEA** remote is designed to withstand moisture and corrosive elements and has a NEMA 4X rating. The **SEA** remote is suitable for use in food preparation areas, wash down environments, pools, locker rooms and anywhere moisture is present. The die-cast aluminum body and teflon coated glass lens offer protection and superior performance.

NEMA 4X DESIGN

The **SEA** has been designed to perform in applications where the environment would punish any standard remote head. The entire internal cavity of the remote is protected from moisture ingress by an extremely resilient gaskets.

INSTALLATION

The **SEA** series remote is supplied with a weatherproof canopy fits all standard electrical junction boxes for surface ceiling or wall mount applications. Suitable for indoor, outdoor, damp or wet location applications with NEMA 4X protection. Operating temperature is from -40°C to +40°C.

SANITATION LISTED

The **SEA** is sanitation listing approved. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation standards of food service environments.

LAMP SELECTION

	6V	12V	24V
LED-MR16	5, 7W	2, 5, 7W	5, 7W
MR16	5, 10W	10, 12, 20, 35, 50W	12, 20, 35, 50W

ORDERING INFORMATION

Series	Head No.	Voltage/Wattage
SEA	1 (single)	See Lamp Selection
	2 (double)	

EXAMPLE: SEA-2-12V5W-LED



DESCRIPTION: SEA NEMA 4X Remote, 2 heads, 12V 5W LEDs

CSA 22.2 No. 141 performance certified.

TECHNICAL

cCSAus Certified

DIMENSIONS (MM, IN.)

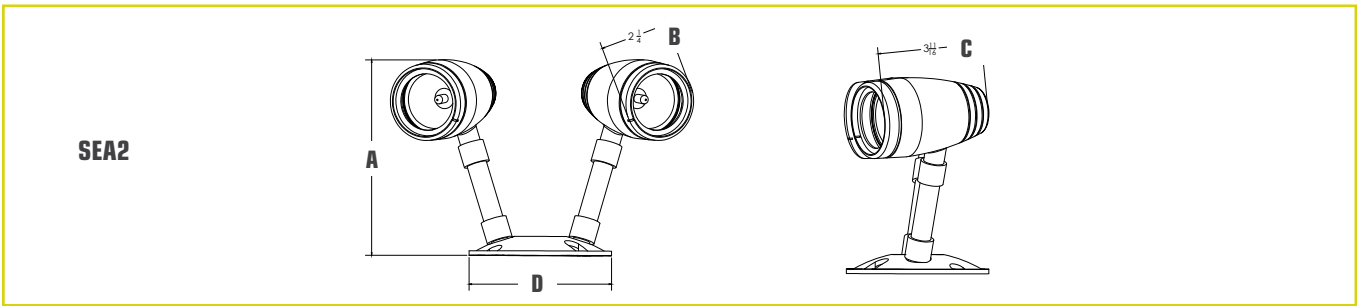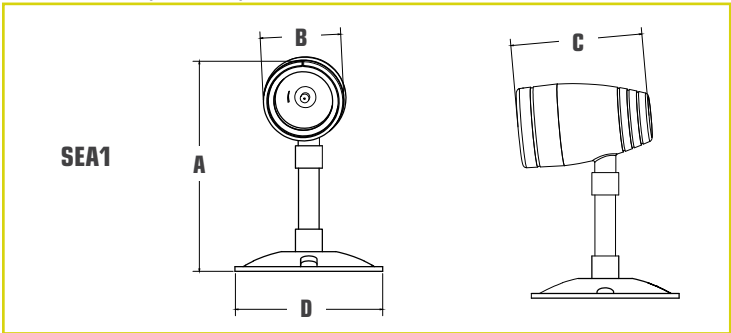

Model	A	B	C	D
SEA1 Single	149mm 5 ⁷ / ₈ "	57mm 2 ¹ / ₄ "	94mm 3 ¹¹ / ₁₆ "	105mm 4 ¹ / ₈ "
SEA2 Double	143mm 5 ⁵ / ₈ "	57mm 2 ¹ / ₄ "	94mm 3 ¹¹ / ₁₆ "	105mm 4 ¹ / ₈ "