

SL

LED STRIP

Type: _____

Project: _____

Delivered Lumens:
8,580 lm

Input Wattage:
65W

Efficacy:
132 lm/W

Colour Temperatures:
3500 - 4000K

**Projected Lumen
Maintenance:**
L₇₀ @ 162,000 hrs.

Sleek design ideal for installation
in tight spaces.



Contoured frosted PMMA diffuser.

Enclosed lens prevents penetration of
dust, insects, and other debris into the
LED compartment.

The **SL** is a high quality luminaire and is equipped with a frosted lens
that diffuses light comfortably. The SL Series is a great option for
retrofitting your traditional fluorescent linear luminaires to balance
performance, aesthetics, and cost

Configurations

MODEL	LENGTH	LUMENS	COLOUR TEMP	INPUT	MOUNTING
SL	8 (ft)	L	35K (3500K)	M (120-347V)	[Blank] Surface Mount with V-Hook
			4K (4000K)		

NOTE: *MINIMUM FREIGHT SURCHARGE MAY APPLY, PLEASE CONTACT CUSTOMER SERVICE.
DLC PRODUCT ID: SL-8L-35K-M (PL8R3KKJ2IZM); SL-8L-4K-M (PL8U4US62STZ)

Accessories

ORDER CODE	DESCRIPTION
50001060	Continuous row mounting aligner for suspended installation
50001073	Replacement lens 96"
50001016	Wireguard kit 96"

HOUSING:

24 gauge white powder painted steel housing.
Sleek, compact design for installation in tight
spaces.

LENS:

Frosted PMMA lens.

ELECTRICAL:

Available in 3500 and 4000K. High efficiency
driver operates 120V through 347V.

L70 at 162,000 hours.

OPERATING TEMPERATURE:

-20°C to 55°C

MOUNTING:

- Surface mount, suspended, or row mounted (see accessories).
- V-Hooks, canopy plate for octagonal junction box, and mounting brackets are included.

DIMMING:

0-10V dimming is standard.

WEIGHT:


8ft: 14.6 lbs. / 6.6 kg.

WARRANTY:

5 year LED warranty, see website for full warranty details.


SL LED Strip

Dimensions

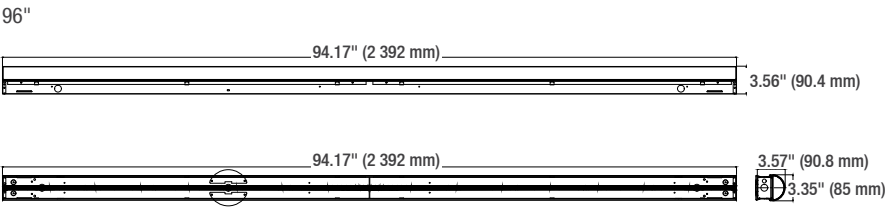

SL-8L-4K-M

Luminous Intensity Distribution

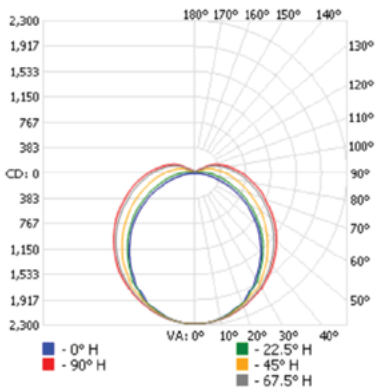

Zonal Lumen Summary

ZONE	LUMENS	% LUMINAIRE
0-30	1766	20%
0-40	2903	34%
0-60	5255	61%
60-90	2322	27%
70-100	1727	20%
90-120	798	9%
0-90	7577	89%
90-180	936	11%
0-180	8514	100%

Energy Chart

MODEL	LENGTH	EFFICACY	WATTAGE	LUMEN OUTPUT ¹	CRI	L70 HOURS ²
SL-8L-35K-M	8ft	133 lm/W	62	8 389	80+	162,000
SL-8L-4K-M	8ft	132 lm/W	65	8 580	80+	162,000

¹Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

²Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations