

Uniko Combo RM Die-cast Running Man Combo

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall or pendant
mounting

High-output
3W LED

394lm output



Die-cast housing

Mounts away from
the wall to give the
illusion of floating



MODERN DESIGN

The **UNIKO** has a thin profile housing to give the appearance of floating as it sits off the wall. Proportion and lines were taken into careful consideration in the design of the **UNIKO** making it ideal for architectural applications.

INSTALLATION

The **UNIKO** is suitable for surface wall or pendant mounting. Double face signs must be pendant mounted. Suitable for indoor installations.

CHARGER SPECIFICATIONS

The **UNIKO COMBO** series charger is a fully automatic current limited charger with solid state line latched low voltage disconnect protection. All components are temperature compensated. The charger also has brownout and short circuit protection. Charger status is determined via a dual diagnostic LED display that indicates AC ON and High Charge. A push button test switch allows maintenance personnel to quickly determine the status of the exit and lamp load on AC fail.


ORDERING INFORMATION

Series	Volts/Watts	Light Source	Face #	Pictogram	Options
UKO-RM	6-36	L (LED)	1 (single)	OLR (Universal pictograms)	AT (Auto-test)
			*2 (double)	O (No indicators)	SW (Special wording - specify)
				L (Left indicator)	WG (Wireguard)
				R (Right indicator)	PK (Pendant kit - specify length)
				D (Down indicator)	PA (Polished aluminum finish)
				U (Up indicator)	
				UR (45° up right)	
				DR (45° down right)	
				UL (45° up left)	
				DL (45° down left)	

NOTE: *Two pictograms or OLR must be ordered, pendant mount only.

EXAMPLE: UKO-RM-6-36-L-1-0-PK12 DESCRIPTION: Uniko combo sign, 6V 36W, single face, no directional indicators, 12" pendant kit.

DIMENSIONS (MM, IN.)

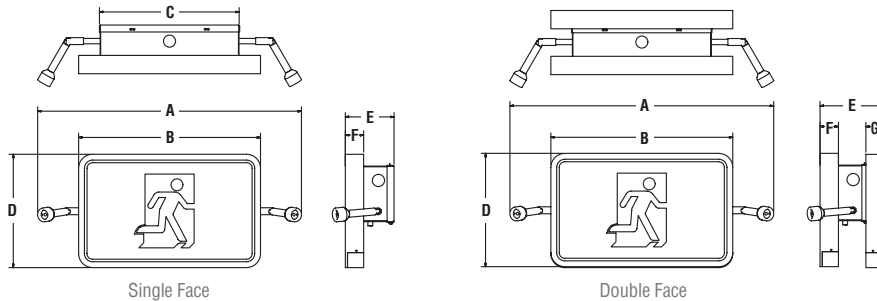

Model	A	B	C	D	E	F	G
Single Face	483mm (19" approx.)	330mm (13")	254mm (10")	210mm (8 ¹ / ₄ ")	89mm (3 ¹ / ₂ ")	31.75mm (1 ¹ / ₄ ")	N/A
Double Face	483mm (19" approx.)	330mm (13")	N/A	210mm (8 ¹ / ₄ ")	114mm (4 ¹ / ₂ ")	31.75mm (1 ¹ / ₄ ")	31.75mm (1 ¹ / ₄ ")

ELECTRICAL SPECIFICATIONS

The **UNIKO** series is configured with high-output LEDs to light the sign and supplied standard with 120/277/347VAC input. High-output LED technology provides energy savings, long life and even illumination levels. 120/277/347VAC input, maintenance free, lead calcium batteries are protected by an electronic cut-off circuit that prevents over-discharge. External test switch and monitor LED are standard.

BEGHELLI AUTO-TEST (AT)

The Beghelli auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. The information is communicated simply and intuitively to maintenance personnel via a single multicolour LED. No need to memorize complex indicator protocols. No confusing array of multiple, same coloured LEDs that can be difficult to read from floor level.

MECHANICAL SPECIFICATIONS

The **UNIKO** series is constructed of die-cast aluminum in a brushed finish. The **UNIKO** can be wall mounted or pendant mounted.

INTERNAL SPECIFICATIONS

120/277/347VAC input is standard. **UNIKO COMBO** is CSA 22.2 No. 141-15 Performance Certified.

BATTERY TECHNOLOGY

The **UNIKO COMBO** series is designed with a maintenance free, lead calcium batteries providing emergency lighting duration of 30 minutes. Recharge time of the batteries is twenty-four [24] hours. The maximum battery operating temperature is +40°C and the minimum is +10°C.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



FACE OPTIONS

When ordering a single face, choose one pictogram option. When ordering a double face, choose 2 pictogram options.

LED HEADS

Inside each head is a 3W LED for high performance and long life. The heads can be rotated and aimed for precise positioning. Each head provides 200 lm.

MODEL RATING GUIDE

Model	Wattage Rating		
	30mins	90mins	120mins
UKO-RM-636	36	12	6