

VE2 RM Thermoplastic Running Man

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall, ceiling or end
mounting



Thermoplastic housing

High-output LED
technology


Self-powered models provide
120 minute run time



EXTERNAL SPECIFICATIONS

The **VE2** series is constructed from durable corrosion and flame resistant thermoplastic. The universal **VE2** series comes standard with a mounting canopy, specified pictograms, one [1] backplate and all mounting hardware. The **VE2** series comes standard finished in white. An external LED status indicator and test switch is standard on all self-powered models. 120-347V is standard.

DIMENSIONS (MM, IN.)

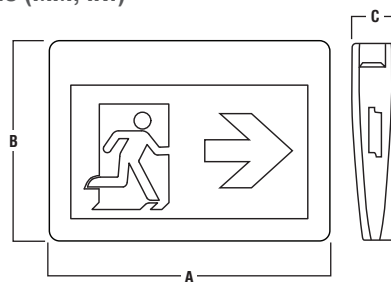

Series	A	B	C
VE2	335mm	225mm	51mm
	13"	8 ^{17/20"}	2"

ORDERING INFORMATION

Series	Operation	Light Source	Face #	Pictogram	Mounting	Options
VE2-RM	Blank (AC only)	L (LED)	*U (Universal)	OLR (Universal pictograms)	M (Universal wall, ceiling or end mount)	WG (Wireguard)
	SP (Self-powered)					UDC (6 - 24VDC)

EXAMPLE: VE2-RM-L-U-OLR-M

DESCRIPTION: VE2 running man, LED, universal faces, universal pictogram, universal mount

INTERNAL SPECIFICATIONS

AC ONLY and SELF-POWERED: standard 120-347VAC input, Self-powered versions use sealed nickel-cadmium batteries to provide a minimum 120 minutes of emergency duration. Electronic cut-off circuit prevents over-discharge. **VE2** signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC. CSA 22.2 No. 141-15 Performance Certified.

MODERN DESIGN

The low profile design of the **VE2** series exit provides a clean, attractive and affordable solution. The durable thermoplastic housing is corrosion and flame resistant. The modern and efficient design of the **VE2** series allows for wall, ceiling or end mounting. Canopy and all installation hardware is included.

INSTALLATION

The **VE2** is suitable for surface ceiling, wall and end mounting. Suitable for indoor and damp installations. Operating temperature is 5°C to 30°C.

ELECTRICAL SPECIFICATIONS

The **VE2** series is configured with high-output LED lamps and supplied standard with 120-347VAC input. The **VE2** consumes only 3W nominal power. High-output LED technology provides energy savings, long life and even illumination levels. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

MECHANICAL SPECIFICATIONS

The **VE2** series is constructed of durable corrosion and flame resistant thermoplastic. The **VE2** series can be universally mounted single or double face. Canopy and mounting hardware are included.

SELF-POWERED VERSIONS

The **VE2** self-powered series is designed to operate on battery power in the event of a power failure. Both the battery and charger are completely contained within the standard enclosure. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit on AC fail.

BATTERY TECHNOLOGY

The **VE2** series is designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 120 minutes. Recharge time of the battery is twenty-four [24] hours.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

