

WR Weather Proof Emergency Remote



Job/Location: _____


Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Impact and corrosion resistant polycarbonate

Up to 2 x 50W halogen or 7W LED lamps

Fully enclosed lamp heads eliminate any unwanted tampering or re-positioning

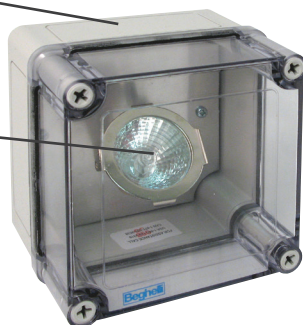

Sanitation listed for food service environments

NEMA 4 & 4X / Wet location

WR - WEATHER PROOF EMERGENCY REMOTE


The **WR** series of NEMA 4 and 4X weatherproof remotes are constructed from durable polycarbonate and are designed to perform in harsh environments. The base is constructed of impact and corrosive resistant Valox® for maximum durability. A plated steel bracket attaches the reflector to the base plate using a threaded nipple and lock nut for tool-less lamp adjustability and ease of re-lamping. The base plate and polycarbonate cover join together to form a complete assembly that is fully gasketed. The **WR** series is designed with several surface conduit knockout points for ease of installation.

SANITATION LISTED (SL)

Equivalent to the NSF standard 2, the Beghelli **WR** is suitable for use in food equipment environments.

CSA 22.2 No. 141-15 Performance Certified.

DIMENSIONS (MM, IN)

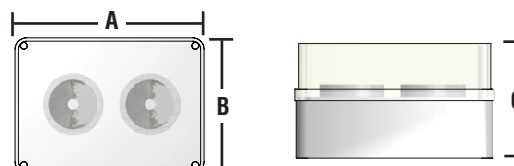

Series	A	B	C
WR-1	127mm 5"	127mm 5"	102mm 4"
WR-2	178mm 7"	127mm 5"	102mm 4"

LAMP SELECTION

	6V	12V	24V	120V
Composite Tungsten	7.2, 9W	9, 12, 18W	9, 18 (25W, PAR36 only)	N/A
Composite Quartz (Q)	6, 8, 10, 12W	12, 20 (55W PAR36 only)	N/A	N/A
MR16	N/A	20, 35, 50W	N/A	N/A
LED-MR16	5, 7W	2, 5, 7W	5, 7W	N/A
GU10	N/A	N/A	N/A	35, 50W
LED-GU10	N/A	N/A	N/A	7W

ORDERING INFORMATION

Series	Head #	Voltage / Wattage	Options
WR	1 (Single lamp)	See lamp selection	TP (Tamper proof screws)
	2* (Double lamps)		KO (Knockouts on housing)

Note *: Maximum fixture capacity is 70W



REMOTES