

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) 1-800-567-2513 (French)

Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:




Wiring supplies
as required by
electrical code

SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.


INSTALLATION: NOTE: Product May Not Look Exactly As Shown In Figures.

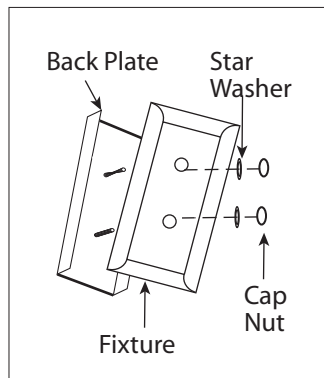


Note: Determine desired mounting option prior to proceeding with installation.

Option#1- Hard-wire


1. Remove the back plate from the fixture by unscrewing cap nuts and star washers.

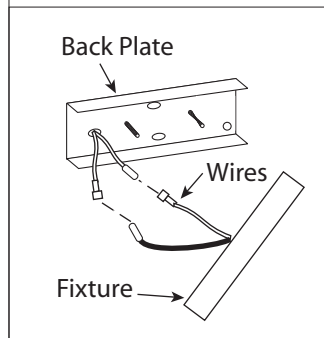

2. Disconnect the male and female wires on the backplate and discard backplate wire assembly.

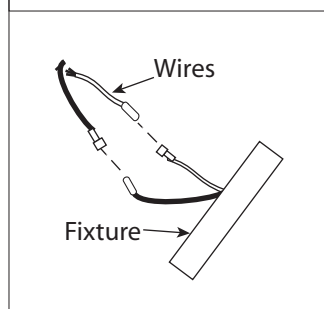


3. Connect the male and female wire from the fixture to the male and female wires in the hardware package.

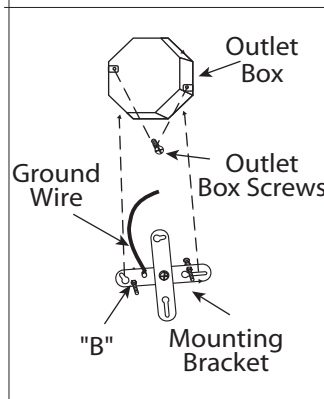


4. Loosen "B". Adjust stud to desired length and lock in place with "B".

5. Attach ground wire on mounting bracket assembly to outlet box ground screw. Mount the mounting bracket to outlet box using outlet box screws. Make sure the studs on the mounting bracket are facing out from the outlet box.

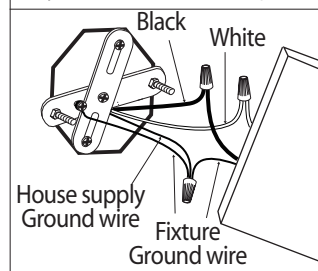


6. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect black wire from fixture to black wire in outlet box and connect the white wire from fixture to white wire in outlet box.

Note: Do not disconnect wires that are already connected on the light.

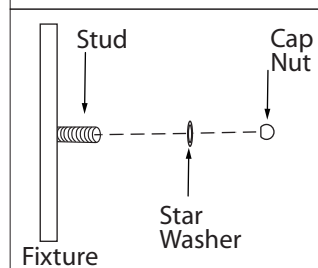


7. Once connections of wires are completed, carefully tuck wires and wire nuts into the outlet box making sure no bare wire (on the black and white) is visible at the wire nuts. Secure fixture in place with star washer(s) and cap nut(s). Proceed to step 8.

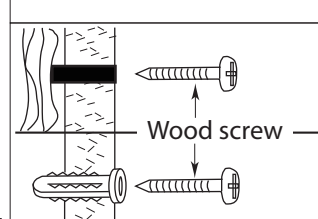

Option#2- Cord and Plug

1. Position the fixture and determine screw location; insert wood screws (one on each side) into wooden studs or plastic wall anchors and wood screws into drywall.

2. Mount pre-assembled back plate to wall using key slots on back plate. Tighten the wood screws against the back plate. Secure the fixture in place with star washer(s) and cap nut(s). Proceed to step 8.

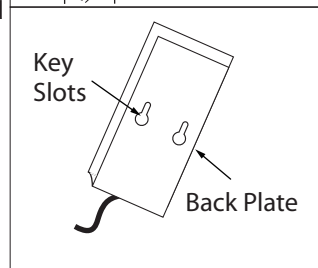

8. Install specified bulb type and wattage (not included).

