



TOOLS AND MATERIALS REQUIRED:




Wiring supplies
as required by
local electrical
code

SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL BOX.
4. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.

NOTE: Product may not look exactly as shown in figures.

INSTALLATION:

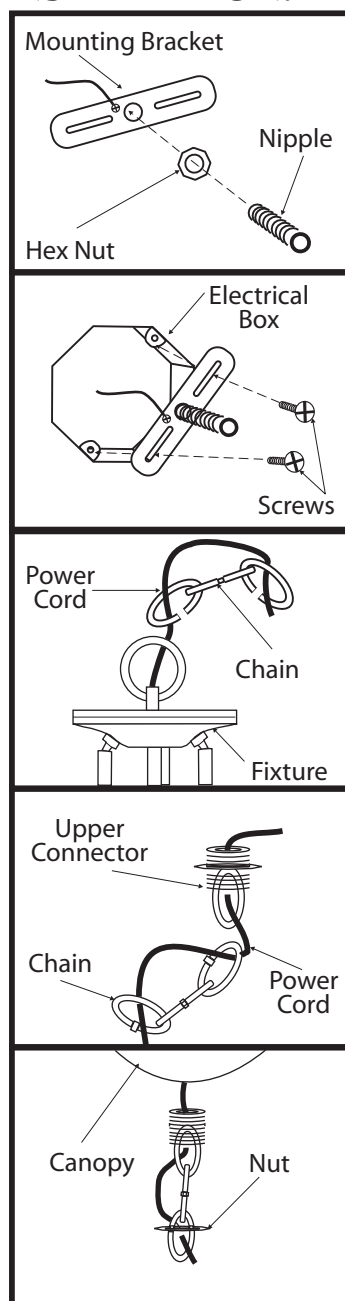


1. Attach nipple to mounting bracket. Adjust so nipple will extend beyond canopy when installed. Spin hex nut over nipple and tighten against mounting bracket, locking in place.

2. Attach mounting bracket to electrical box using electrical box screws (not included).

3. Twist loop of chain open and attach to fixture. Close loop on chain and weave power cord through loops in chain.

4. Twist the loop at the other end of the chain and attach to upper connector. Close loop on chain and feed power cord through upper connector.

5. Spin nut off of upper connector and slip power cord and upper connector through canopy.

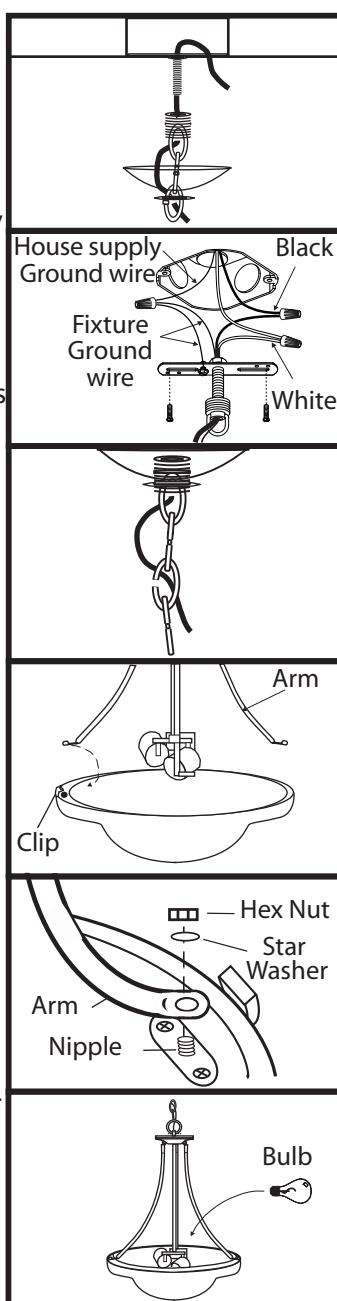

6. Feed power cord through nipple and tighten upper connector to nipple.

7. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire marked "SPT-1") from the fixture to the black wire in the electrical box and connect the white wire (or the wire with ribbed side) from the fixture to the white wire in the electrical box.

8. Tuck electrical wires into electrical box. Slide canopy into position and tighten in place by sliding upper connector nut into position and tighten.

9. Set glass in pan. Insert nipple through the hole at the end of the arm. Lock the arm in place with star washer and nex nut. Repeat for other arms.

10. Install proper bulb type and wattage (not included).