

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English)

1-800-567-2513 (French)

Monday through Friday 8:00 AM to 5:00 PM E.S.T.

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters

Wiring supplies
as required by
electrical code



Pliers



Wrench

SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.







DO NOT REMOVE INSULATION FROM FIXTURE.

2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

3. CAUTION – RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

NOTE: Product May Not Look Exactly As Shown In Figures.

INSTALLATION:

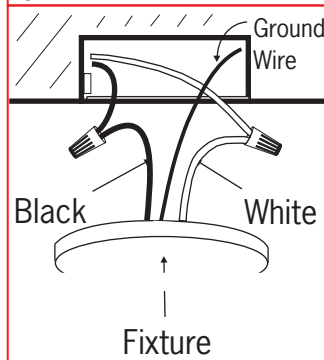

1. Note: Refer to the mounting bracket style that matches the bracket that is included with your fixture.

Style#1 (Non-Threaded holes)
Loosen hex nut "A" and "B". Adjust stud so it clears the fixture once assembled. Hold in place with "A" and lock in place with "B".







Style#2 (Threaded holes)
Loosen "B". Adjust stud to desired length and lock in place with "B".

Style#3 (Nipple)
Attach nipple to mounting bracket and adjust until it will clear fixture when assembled. Lock in place using the hex nut.

2. Mount the mounting bracket to outlet box using outlet box screws. Make sure the studs or nipple on the mounting bracket are facing out from the outlet box.

3. Connect ground wire on fixture to outlet box ground screw. Connect black wire from fixture to black wire in outlet box and connect the white wire from fixture to white wire in outlet box.

Note: Do not disconnect wires that are already connected.



4. Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).

5. Install the proper bulb type and wattage. Install shield if required.

6. Note: Refer to the style of assembly that matches the style of your fixture.

Style #1: Slide the glass shade into clips.

Style #2: Slide the glass shade into the top and bottom slots, one at a time.

Style #3:
Step 1: Insert glass by lining up support screws with the holes in the fixture.

Step 2: Secure glass in place by tightening cap nuts over support screws.