

CWP04 Wall Pack

80W | Colour Tunable | 120-347V



Ideal for entryway and exterior security lighting

Easy installation and maintenance with colour temperature and voltage options

Built-in Photocell
(can be bypassed with switch)

120-347V Driver
with 6KV surge protection

**Instant Start, Soft,
Uniform Light**



Colour Tunable
3000K/4000K/5000K

**Durable Die-Cast
Aluminum Housing**

**Borosilicate
Glass Lens**

Optional Accessories (sold separately):
Wireguard, Visor, Motion Sensor, Remote



CWP04-WG



CWP04-VISOR



HB01DMS-C



HB01R

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	11,071 lm
Efficacy	137.5 lm/W
CCT	Tunable 30K/40K/50K
CRI	82
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year

APPROVALS AND LISTINGS


cUL	E482965
DLC	PL1UW2U7XNOH

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	8.21 fc	36.4 ft	39.9 ft
34.0ft	2.05 fc	72.8 ft	79.7 ft
51.0ft	0.91 fc	109.3 ft	119.6 ft
68.0ft	0.51 fc	145.7 ft	159.5 ft
85.0ft	0.33 fc	182.1 ft	199.4 ft
102.0ft	0.23 fc	218.5 ft	239.2 ft

■ Vert. Spread: 93.9°
■ Horiz. Spread: 99.1°

ISOCANDELA PLOT

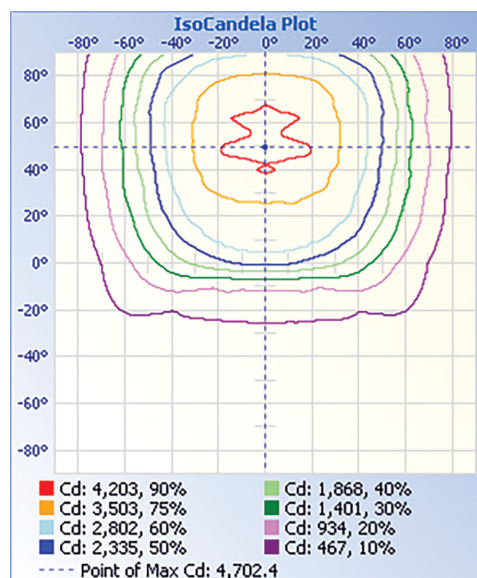

ELECTRICAL

Wattage	80W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Borosilicate Glass
Finish	Bronze
IP Rating	IP65
Net Weight	3.5 kg
Gross Weight	4.5 kg
Carton Qty	1
Carton Dimensions	397 x 297 x 250 mm

ACCESSORIES (Ordered Separately)

Visor	CWP04-VISOR
Motion Sensor	HB01DMS-C
Remote	HB01R
Wireguard	CWP04-WG

Note: HB01R (remote) is **required** for HB01DMS-C (motion sensor)

DIMENSIONS

