

Assembly Instruction Sheet #IS- 5549W6C
For Style 5549W6C

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (1) E12 Candelabra Base Bulb 60W Maximum(Not Include).

Estimated Assembly Time: 15-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.
These instructions are provided for your safety. It is very important you read them completely before installing the fixture.
We strongly recommend that a licensed, professional electrician perform the installation.
Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

- 1 Fixture Body x1
- Crystal x1 Crystal x1 Crystal x1 Crystal x1 Crystal x1

Hardware Contents

PNF#	DESCRIPTION	QUANTITY
AA	Decorative Caps	2PCS
BB	Backplate	1PCS
CC	Outlet Box	2PCS
DD	Mounting Screws	2PCS
EE	Mounting Bracket	2PCS

STEP 1 – Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting Bracket.

A. Line up a set of holes on the Mounting bracket (EE) and Holes on the Backplate.
Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Place Lock Washers and Thread Hex Nuts onto the Mounting Screws (DD).
Hand tighten until snug.




Figure 1

STEP 2 – Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws.
Tighten until snug.




Figure 2

STEP 3 – Fit Backplate to Mounting bracket Assembly

A. Fit the backplate to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The backplate should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the backplate is secure, remove the Decorative Caps (AA) and backplate and proceed to Step 4




Figure 3

STEP 4 – Wire Connections

A. Use standard wire connections to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully seal it at the connected wires into the Outlet Box.

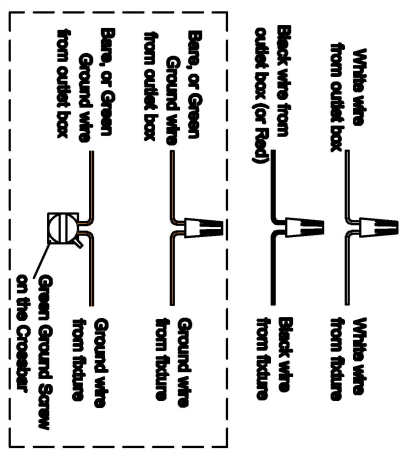


Figure 4

STEP 5 – Install Backplate to Ceiling

A. Carefully tuck all wires into the outlet box and position the backplate of the Fixture Body (A) over the outlet box. Align the holes in the backplate with the Mounting Screws (DD). Secure with Decorative Caps (AA) and hand tighten until snug.





Figure 5

STEP 6 – Install Crystal and bulb.

A. Install bulbs into sockets and screw snug into place.
B. Please put the crystal (B) (C) (D) and (E) to the Fixture Body (A).

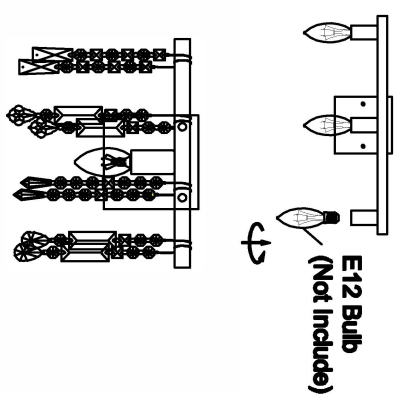

- B 14MM*12PCS
14MM*2PCS
38MM*2PCS
Crystal x1
- C 14MM*4PCS
14MM*2PCS
60MM*2PCS
38MM*2PCS
Crystal x1
- D 14MM*6PCS
14MM*8PCS
50MM*2PCS
Crystal x1
- E 14MM*6PCS
14MM*2PCS
60MM*2PCS
38MM*2PCS
Crystal x1

Figure 6