

Date: _____ Fixture: _____

QTY: _____ Project: _____



DelSnap Flat

Back-lit flat panel. CCT and Wattage tunable. 1x4, 2x2, and 2x4 size options. Commercial and industrial applications.

DLC Listed. ETL Listed. 10 Year Warranty.

CCT & Wattage Tunable

10 YEAR
WARRANTY

Ordering Options

MODEL	PART NUMBER	SIZE	WATTS	COLOR TEMP	VOLTAGE	FINISH
Delsnap Flat Panel	AL-LT50WYYK1206DP - LOW	2 x 4	20, 25, 30	35K 3500K	100 - 347V	WH White
	AL-LT50WYYK1206DP - HIGH		30, 40, 50	4K 4000K		
	AL-LT30WYYK1203DP	1 x 4	25, 30, 36	5K 5000K		
	AL-LT36WYYK0606DP	2 x 2	25, 30, 36			

DELSNAP FLAT PANEL						WH
--------------------	--	--	--	--	--	----

MOUNTING	
----------	--

EMBD Embedded
SMK Surface Mount Kit

--	--

SAMPLE: DELSNAP FLAT PANEL - AL-LT50WYYK1206DP - 2x4 - 30 - 4K - 120V - WH - EMBD

Product Specifications

Efficacy: 130 Lm/W @ 4000K

Color Temperature: 3500K, 4000K, 5000K

* Switching position of a potentiometer

Watts: 20W, 25W, 30W, 36W, 40W, 50W

Voltage: 100 - 347V


Lumen Maintenance: L70 > 100,000 hours

Output Performance

Size	Watts	CCT	Lm/W	Lumens
2x4	20, 25, 30	35K, 4K, 5K	130 @4K	2,600, 3,250, 3,900
	30, 40, 50	35K, 4K, 5K	130 @4K	3,900, 5,200, 6,500
1x4	25, 30, 36	35K, 4K, 5K	130 @4K	3,250, 3,900, 4,680
2x2	25, 30, 36	35K, 4K, 5K	130 @4K	3,250, 3,900, 4,680



Specifications subject to change without notice.

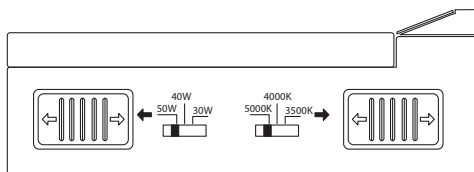


* Dip switch position for choosing preset values - Located on driver box


(2x4 model preset values shown)

Dimensions


DelSnap Flat 2 x 2




DelSnap Flat 1 x 4

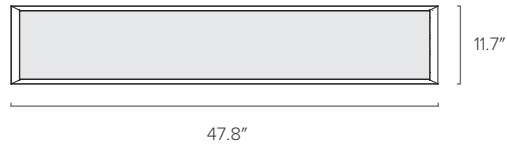

DelSnap Flat 2 x 4

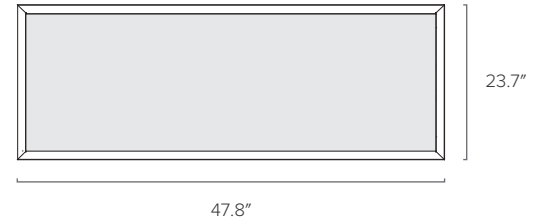

Wiring

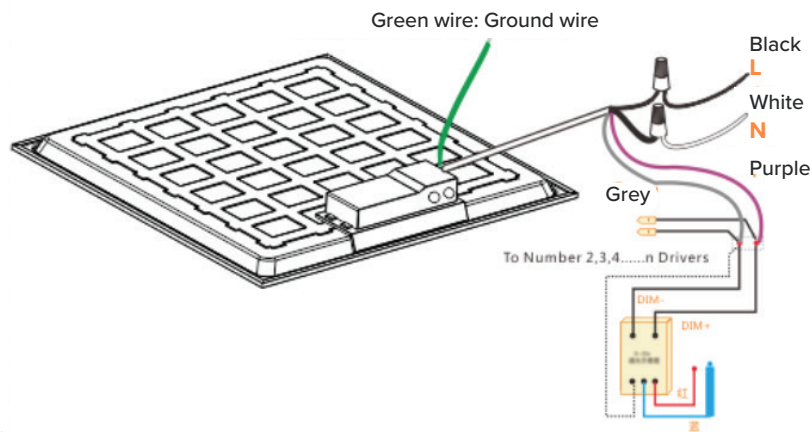

Installation

