


10[★]YR
WARRANTY

DATE	FIXTURE	QTY	PROJECT

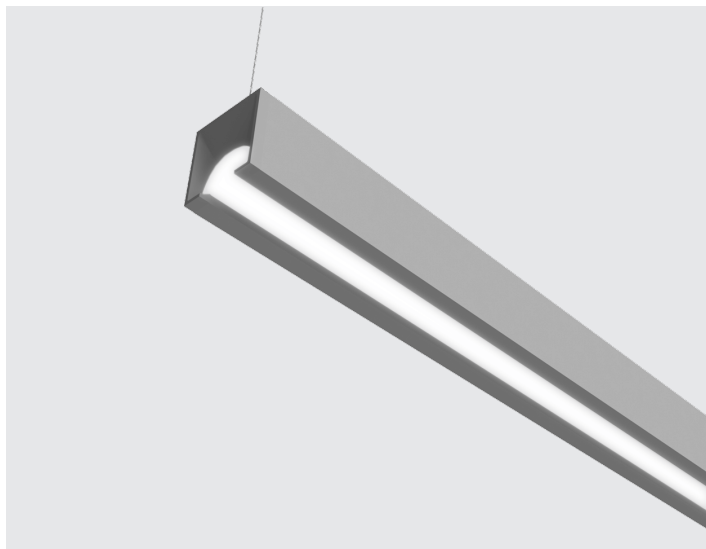

Thinline Arch Square

Pendant Mounting

Direct-Indirect

Architectural luminaire. Contemporary design. Aluminum housing. Direct-Indirect distribution. 4, 6, and 8 foot lengths. Frosted lens. Continuous run options available. Standard Grey, white and black finishes. Custom finishes available. Designed and manufactured in North America. 10 Year Warranty.

ORDERING GUIDE

MODEL	LENGTH	DIRECT: WATTS/FT	INDIRECT: WATTS/FT	COLOR TEMP		VOLTAGE		LENS OPTIONS	
DTL	2' 6' 8'	2.5 3.5 5 7.5 10	2.5 3.5 5	27K 3K 35K 4K 5K	2700K 3000K 3500K 4000K 5000K	U H	120/277V 347V	FR	Frosted
DTL								FR	

FINISH		MOUNTING		WIRING		ACCESSORIES		FIXTURE TYPE
GRY WH BLK CU	Grey White Black Custom (consult factory)	AC	Aircraft Cable	BFC WFC GFC 3 WIRE 5 WIRE N	Black Flexible Cord White Flexible Cord Grey Flexible Cord 3 Conductor Wire _____ 5 Conductor Wire _____ No Cord	N DALI DMX 10kV EMBAT	None 10kV Surge Protection Emergency Battery Backup	ARCH SQ
		AC						ARCH SQ

SAMPLE: DTL-4-6-2.5-2.5-4K-U-FR-GRY-AC-BFC-N-ARCHSQ

SPECIFICATIONS

Efficacy: 75 Lm/W

CRI: 80+

Color Temperature: 3000K, 3500K, 4000K, 5000K

Lumen Maintenance: 200,000+ Life Hours (L70)

Voltage: 120/277V | 347V

Operating Temperature: -20°C to +40°C

Controls

0-10V Dimming

DMX

DALI

Wireless (consult factory)

Mounting

Aircraft Cable

Wiring

Black, White, and Grey flexible cord

3 and 5 Conductor Wire

OUTPUT PERFORMANCE

Distribution	Watts/ft	Delivered Lumens/ft
Direct	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750

Distribution	Watts/ft	Delivered Lumens/ft
Indirect	2.5	187.5
	3.5	262.5
	5	375

MEASUREMENTS

