


10[★]YR
WARRANTY

DATE	FIXTURE	QTY	PROJECT

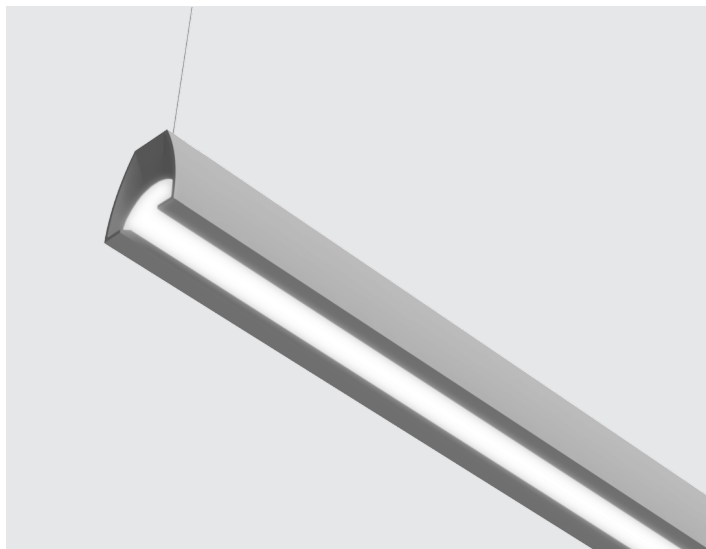

Thinline Arch

Pendant Mounting

Direct | Direct-Indirect

Architectural luminaire. Contemporary design. Aluminum housing. Direct and Direct - Indirect options. 4, 6, and 8 foot length options. Frosted lens. Standard Grey, white and black finishes. Custom finishes available. Designed and manufactured in North America. 10 Year Warranty.

ORDERING GUIDE

MODEL	LENGTH	DIRECT: WATTS/FT	INDIRECT: WATTS/FT	COLOR TEMP		VOLTAGE		LENS OPTIONS	
DTL	2' 6' 8'	2.5 3.5 5 7.5 10	2.5 3.5 5 7.5 10	27K 3K 35K 4K 5K	2700K 3000K 3500K 4000K 5000K	U H	120/277V 347V	FR	Frosted
DTL								FR	

FINISH		MOUNTING		WIRING		ACCESSORIES		FIXTURE TYPE
GRY WH BLK CU	Grey White Black Custom (consult factory)	AC	Aircraft Cable	BFC WFC GFC 3 WIRE 5 WIRE N	Black Flexible Cord White Flexible Cord Grey Flexible Cord 3 Conductor Wire _____ 5 Conductor Wire _____ No Cord	N DALI DMX 10kV EMBAT	None 10kV Surge Protection Emergency Battery Backup	ARCH
		AC						ARCH

SAMPLE: DTL-4-6-2.5-2.5-4K-U-FR-GRY-AC-BFC-N-ARCH

SPECIFICATIONS

Efficacy: 75 Lm/W

CRI: 80+

Color Temperature: 3000K, 3500K, 4000K, 5000K

Lumen Maintenance: 200,000+ Life Hours (L70)

Voltage: 120/277V | 347V

Operating Temperature: -20°C to +40°C

Controls

0-10V Dimming

DMX

DALI

Mounting

Aircraft Cable

Wiring

Black, White, and Grey flexible cord

3 and 5 Conductor Wire

OUTPUT PERFORMANCE

Distribution	Watts/ft	Delivered Lumens/ft
Direct	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750

Distribution	Watts/ft	Delivered Lumens/ft
Indirect	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750

MEASUREMENTS

