


SUBJECT SPECIFICATION SHEET

CUSTOMER PROJECT

Project: _____
Type: _____
Cat. No.: _____
Qty: _____
Date: _____
EEL Rep: _____

EELighting

solutions closer to nature



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

PRODUCT DESCRIPTION

This emergency light is constructed with a steel housing, unit is suitable for all indoor applications. It is illuminated with high efficiency LED chips. Universal mounting knockouts and keyhole slots are pre-stamped on the back and side wall mount knockouts are on the side of each unit.

SPECIFICATION FEATURES

Construction

Steel housing; Suitable for wall mounting or ceiling mounting;
Universal knockouts and keyhole slots are pre-stamped on the back housing and side wall mount knockouts available on the side of each unit.

Controls

LED Indicator light and push button test switch
LED's mounted on printed circuit board

Electrical

120-240
3.6V 1000mAh long-life, rechargeable Ni-cad Battery
1W ultra bright LED arrays.
120 minutes discharge time after charging battery for 20 hours
Ambient temperature 5 °C to 30 °C
Suitable for damp locations

Mounting

Wall mount and ceiling mount

Finish

White

Face Options

Single or double face
3 pictograms: no directional indicator, left facing directional indicator and right facing directional indicator

Compliance

CSA listed and meets all requirements in C22.2 No. 141-15

Warranty



2 years



**CM Series
Running Man Exit Sign**



3 Signs Included

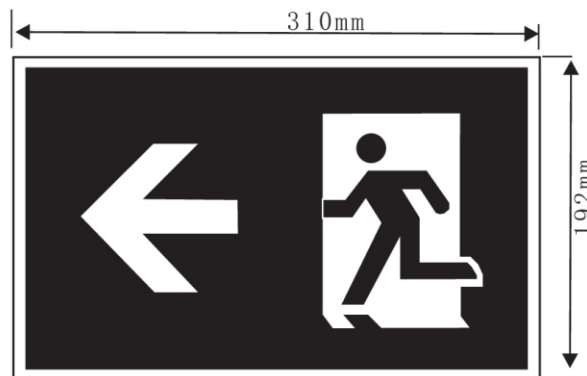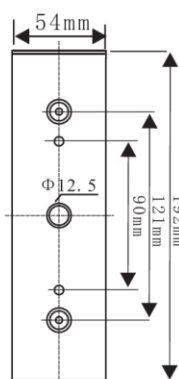


CM-129RM-SP

Dimensions

mm | 310(L) x 51(W) x 192(H)
inch | 12.2(L) x 11(W) x 5.6(H)



www.eelighting.ca



ORDERING CODE, ENERGY AND PERFORMANCE DATA



Model No.	Battery	Voltage (V)*	Hz	Charge Time	Input Watts	Discharge Time	Type	Certification
CM-129RM-SP	Ni-cad Battery 3.6V/1000mAh	120 240	50-60	20 hours	3 3.5	120 minutes	Standard	

NOTE:

- Lumens are estimated.

