


CM-152 ABS White

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____
 Qty: _____
 Date: _____
 EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

This running man exit sign is constructed of thermal plastic housing and PC pictogram sign. It is suitable for wall mounting, side mounting and ceiling mounting.

SPECIFICATION FEATURES

Construction

- ABS Housing (UL94V-0 Flame Rating)
- PC Pictogram

Mounting

- Housing snaps to canopy
- Simple twist and lock will tightly secure to the housing

Controls

- LED Indicator light and push button test switch
- LED's mounted on printed circuit board (PCB)

Finish

- White

Face Options

- Single or double face
- 3 pictograms: no directional indicator, left facing directional indicator and right facing directional indicator



Compliance

- UL 924
- Suitable for damp locations

Warranty

- 3-Year Warranty



CM-152 ABS WHITE

CM Series

Wattage(s) 4W

Voltage 120V or 347V




Hz 60

CCT 6500K

Battery Type Ni-Cad 3.6V

Operating Temperature 0°C to 40°C

Input Current 0.4A

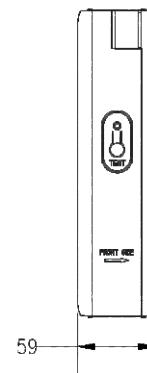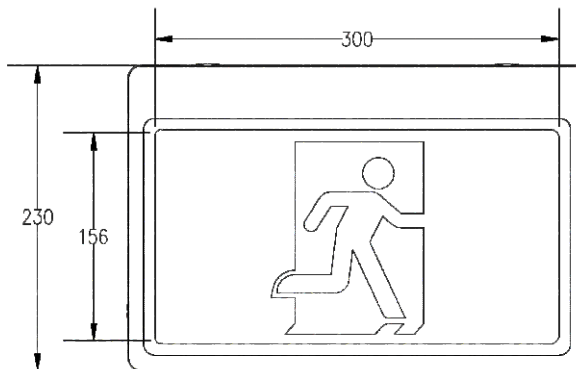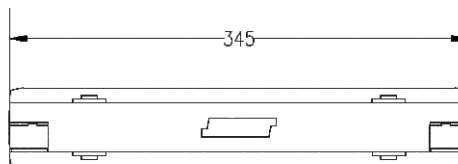

ORDERING CODE, ENERGY AND PERFORMANCE DATA

Model No.	Battery	Voltage (V)	Hz	Charge Time	Input Watts	Discharge Time	Certification
 CM-152 ABS White	Ni-Cad 3.6V	120 or 347	60	24 hours	4	>120 minutes	



www.eelighting.ca