

SUBJECT SPECIFICATION SHEET**CM Series Emergency Light With Running Man Exit Sign****CUSTOMER PROJECT**

Project: _____


Type: _____

Cat. No.: _____

Qty: _____

Date: _____

EEL Rep: _____

EELighting**solutions closer to nature**

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

PRODUCT DESCRIPTION

This emergency light with high efficient LED lamp heads has a simple, modern design that is suitable for any indoor application. Constructed of steel (main housing) and lightweight thermal plastic ABS lamp head housing. Universal mounting knockouts, keyholes on the back and conduit knockouts are on the sides of each unit.

SPECIFICATION FEATURES**Construction**

Steel housing with lightweight injection-moulded thermoplastic Acrylonitrile Butadiene Styrene (ABS) heads (UL94V-0 flame rating). Suitable for wall mounting or ceiling mounting. Universal mounting knockouts and keyhole slots are stamped on the back housing. Side wall mount knockouts available on the side of each unit. Two fully adjustable glare-free LED heads for emergency light

Controls

LED Indicator light and push button test switch
LED's mounted on printed circuit board

Electrical

120-240
6V/6Ah Lead-Acid Battery
SMD 2W high power LED, CCT 6500-7500K for emergency lamp heads and 1W LED arrays for exit sign
120 minutes discharge after charging battery for 20 hours
Ambient temperature 5 °C to 30 °C
Suitable for damp locations

Mounting

Wall mount and ceiling mount

Maximum recommended quantity for remote heads (excluding the built-in ones):

1. 4 pcs of CM201A or 2 pcs of CM202A (discharge time: 90 minutes)
2. 16 pcs of CM201A or 8 pcs of CM202A (discharge time: 30 minutes)

Finish

White

Face Options

Single face
3 pictograms: no directional indicator, left facing directional indicator and right facing indicator



Compliance

CSA listed and meets all requirements in C22.2 No.141

Warranty

2 years


CM Series Emergency Light With Running Man Exit Sign

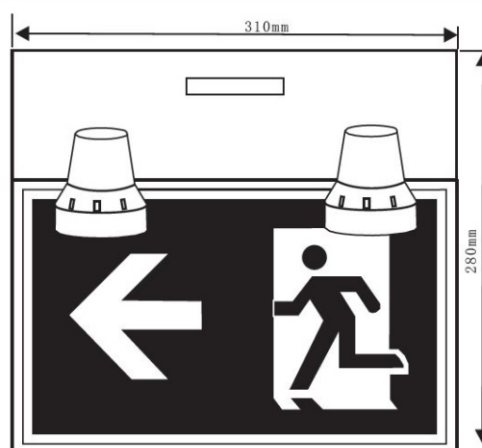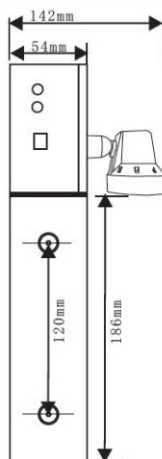

CM-315-RM
Dimensions
mm | 310(L) x 280(W) x 142(D)
inch | 12.2(L) x 11(W) x 5.6(D)



www.eelighting.ca



ORDERING CODE, ENERGY AND PERFORMANCE DATA





Model No.	Battery	Voltage (V)*	Hz	Charge Time	Input Watts	Lamp Head	Discharge Time	Lumen Output	Type	Certification
CM-315-RM	Lead-Acid Battery 6V/6Ah	120 240	50-60	20 hours	3.2 3.3	2W X 2pcs	120 minutes	250 lm	Standard	

NOTE:


- Lumens are estimated.

PHOTOMETRICS

Luminous intensity distribution

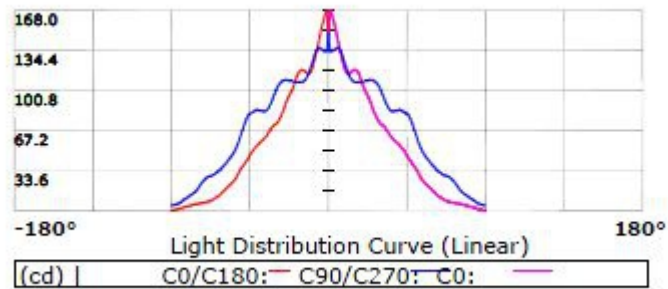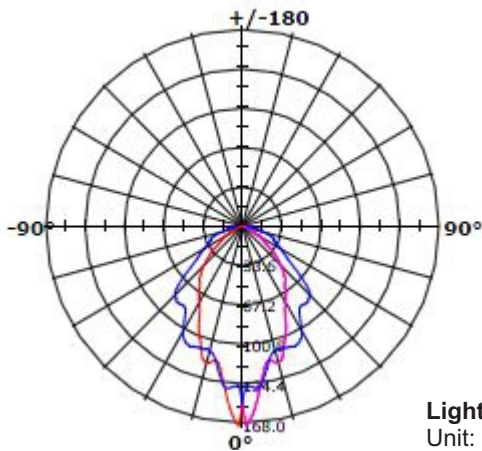

Light Distribution Curve
Unit: cd

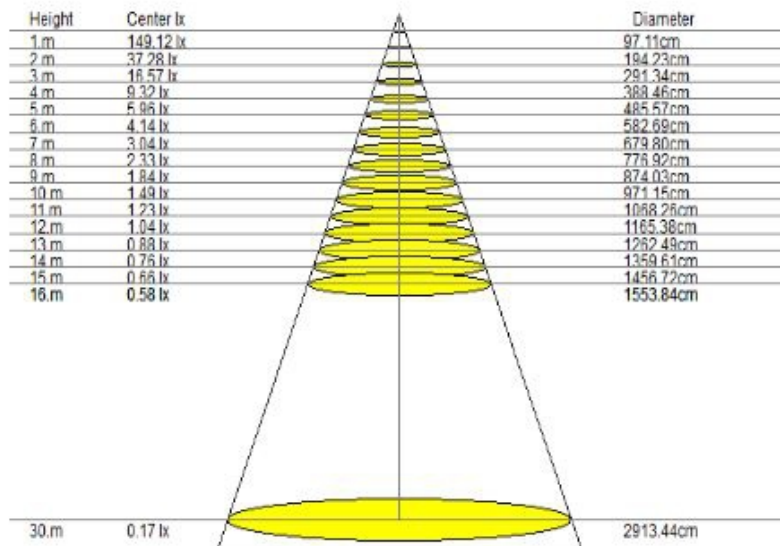

Lux Distance Curve
Beam angle: 51.80° (50% Imax)

