

SPECIFICATION SHEET

SUBJECT

LED RUNNING MAN EXIT SIGN

CUSTOMER PROJECT

Project: _____
Type: _____
Cat. No.: _____
Qty: _____
Date: _____
EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

This running man exit sign is constructed of thermal plastic housing and PC pictogram sign. It is suitable for wall mounting, side mounting and ceiling mounting.

SPECIFICATION FEATURES

Construction

Injection-moulded thermoplastic ABS housing with PC pictogram
UL94V-0 flame rating
Suitable for wall mounting, ceiling mounting and side mounting
Housing snaps to canopy with simple twist and locking tightly secure to housing

Controls

LED Indicator light and push button test switch
LED's mounted on printed circuit board

Electrical

120-240
3.6V long-life, rechargeable Ni-Cad battery
High output LED light source
CCT 6500K to 7500K for LED exit sign
Min. 120 minutes discharge after charge battery 20 hours
Ambient temperature 5°C to 30°C. Suitable for damp locations

Finish

White

Face Options

Single or double face
3 pictograms: no directional indicator, left facing directional indicator and right facing directional indicator

Compliance


CSA listed and meets all requirements in C22.2 No. 141-10

Warranty

2 years



CM SERIES LED RUNNING MAN EXIT SIGN

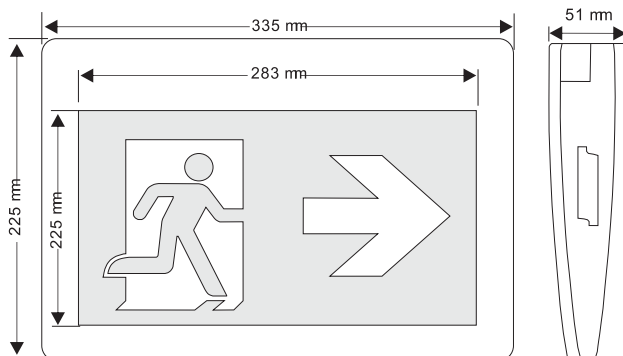

CM126 (SP)

Dimensions

mm | 335(L) x 225(W) x 51(D)
inch | 13.2(L) x 8.9(W) x 2(D)



3 signs included



www.eelighting.ca

R191015-1002



ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Battery	Voltage (V)	Hz	Charge Time	Input Watts	Discharge Time	Certification	Type
	CM126 (SP)	Ni-cad 3.6V 1300mA	120-240	60	20 hours	3	>120 minutes		Standard