

ER221120MHT



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Series	Input Voltage:	120 to 277
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	Yes	Max. Case Temperature:	90°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps) @120/277V	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
F14T5	1	14	-20 / -29	0.15 / 0.07	18	1.00	10	0.99	1.50	5.56
	2			0.29 / 0.13	34					2.94
F21T5	1	21		0.21 / 0.09	25					4.00
	2			0.42 / 0.18	50					2.00
F25T5	1	25		0.25 / 0.12	30					3.33
F28T5	1	28		0.27 / 0.13	33					3.03
F35T5	1	35		0.34 / 0.15	41					2.44

REGULATORY COMPLIANCE


- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant

RoHS
compliant ✓



PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

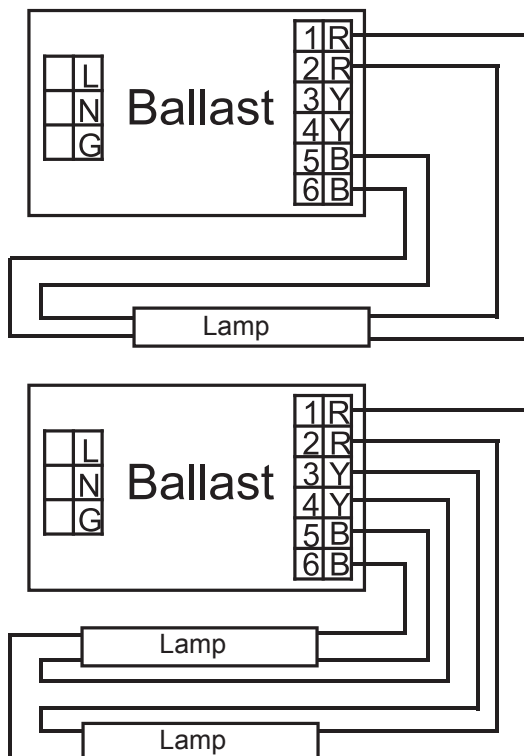

CASE DIMENSIONS

Overall (L)	11.50"	292.1 mm
Width (W)	1.32"	33.5 mm
Height (H)	1.05"	26.7 mm
Mounting (M)	11.25"	285.8 mm

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
ER221120MHT	21.0 lbs	14.0" x 8.7" x 6.3"	20	1300