

ER221347MHT



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Series	Input Voltage:	277 to 347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	Five Years
End-of-Life Protection:	Yes	Max. Case Temperature:	90°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps) @277/347V	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
F14T5	1	14	-20 / -29	0.07 / 0.05	18	1.00	10	0.99	1.50	5.56
	2			0.13 / 0.10	34					2.94
F21T5	1	21		0.10 / 0.07	25					4.00
	2			0.18 / 0.15	50					2.00
F25T5	1	25		0.12 / 0.10	31					3.23
F28T5	1	28		0.13 / 0.10	33					3.03
F35T5	1	35		0.16 / 0.13	41					2.44

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)

- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant

RoHS
compliant ✓



ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888


FAX 905.940.0338

WWW.ULTRASAVE.CA

Data published here is based on the result of a test under a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. E2913USL

PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

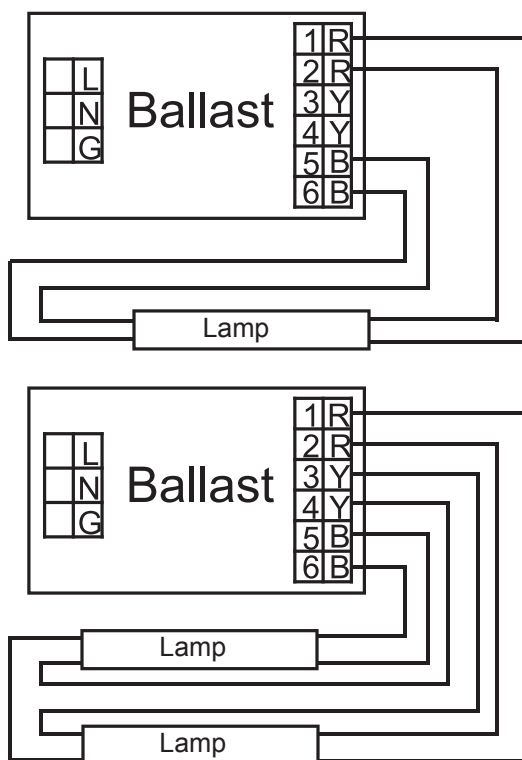

CASE DIMENSIONS

Overall (L)	11.50"	292.1 mm
Width (W)	1.32"	33.5 mm
Height (H)	1.05"	26.7 mm
Mounting (M)	11.25"	285.8 mm

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
ER221347MHT	21.0 lbs	14.0" x 8.7" x 6.3"	20	1300

ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888

FAX 905.940.0338

WWW.ULTRASAVE.CA

Data published here is based on the result of a test under a controlled environment. Actual performance can vary depending on operating conditions.
Specifications are subject to change without notice. E2913USL