

ER235120MHT



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Series	Input Voltage:	120 to 277
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	Yes	Max. Case Temperature:	90°C

Electrical Specifications

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps) @120/277V	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
F28T5	2	28	-22/ -30	0.56/0.25	69	1.00	10	0.99	1.7	1.45
	1			0.29/0.13	35					2.86
F35T5	2	35		0.69 / 0.30	85					1.18
	1			0.35 / 0.16	42					2.38


Regulatory Compliance

- Meets ANSI Standard C82.11-1993
- Meets ANSI Standard C62.41-1991
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)

- Type HL
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- DOE Energy Verified



Wiring Diagram

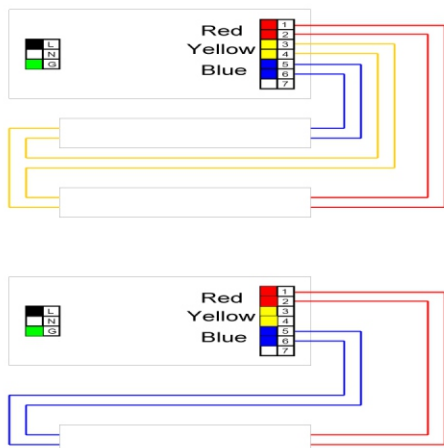

Product Dimensions



This photo is for dimensions only.

Overall (L)	Width (W)	Height (H)	Mounting (M)
11.50 "	1.34 "	1.06 "	11.14 "
29.2 cm	3.4 cm	2.7 cm	28.3 cm