

ER235347MHT



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Series	Input Voltage:	277 to 347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	Yes	Max. Case Temperature:	90°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps) @277/347V	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
F28T5	2	28	-20 / -29	0.22 / 0.18	60	1.00	10	0.99	1.50	1.67
	1			0.11 / 0.09	30					3.33
F35T5	2	35		0.29 / 0.23	80					1.25
	1			0.15 / 0.12	40					2.50
F14T5	2	14		0.14 / 0.11	37	1.14				3.08

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)


- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant

RoHS
compliant ✓



PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

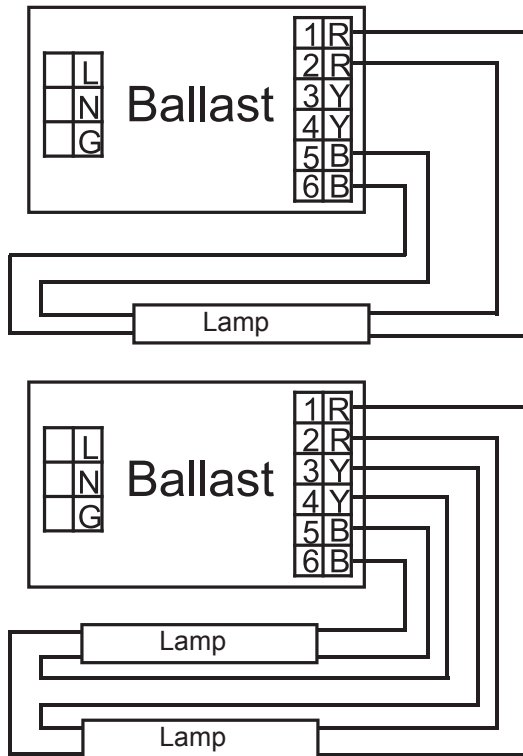

CASE DIMENSIONS

Overall (L)	11.50"	292.1 mm
Width (W)	1.32"	33.5 mm
Height (H)	1.05"	26.7 mm
Mounting (M)	11.25"	285.8 mm

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity	Bulk Quantity
ER235347MHT	22.7 lbs	14.0" x 8.7" x 6.3"	20	1300	1530