

ER424347HT-W



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Two Series Circuits in Parallel	Input Voltage:	347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	Five Years
End-of-Life Protection:	Yes	Max. Case Temperature:	90°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
F24T5HO	3	24	-20 / -29	0.23	81	0.91	10	0.99	1.70	1.12
	4			0.30	105	0.89				0.85

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11-1993
- Meets ANSI Standard C62.41-1991
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant

RoHS
compliant ✓



ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888


FAX 905.940.0338

WWW.ULTRASAVE.CA

Data published here is based on the result of a test under a controlled environment. Actual performance can vary depending on operating conditions.
Specifications are subject to change without notice. J2612USL

PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

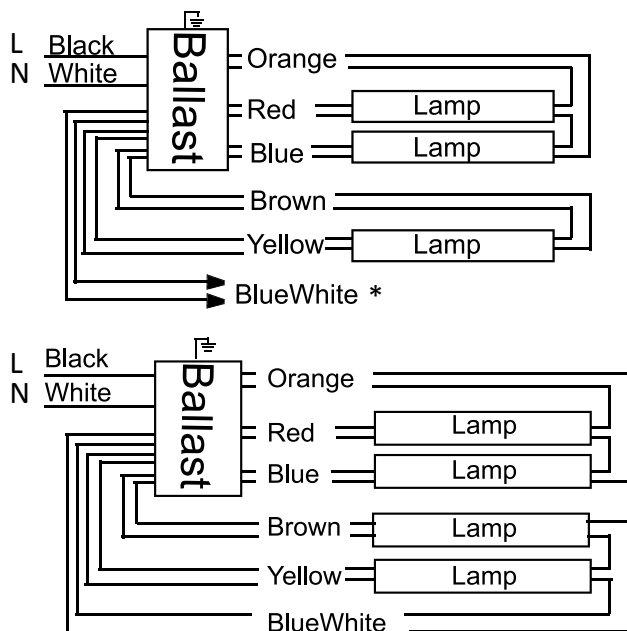

LEAD LENGTH

Wire	in
Black	18
White	18
Red	30
Orange	46
Blue	30
Brown	40
Blue/White	46
Yellow	30

CASE DIMENSIONS

Overall (L)	17.71"	449.8 mm
Width (W)	1.72"	43.7 mm
Height (H)	1.18"	30.0 mm
Mounting (M)	17.24"	437.9 mm

* Cap off each BlueWhite wire separately

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
ER424347HT-W	26.8 lbs	18.9" x 10.2" x 5.7"	10	480

ULTRASAVE LIGHTING LTD.

12-140 AMBER STREET, MARKHAM, ON L3R 3J8

TEL 905.940.0888

FAX 905.940.0338

WWW.ULTRASAVE.CA

Data published here is based on the result of a test under a controlled environment. Actual performance can vary depending on operating conditions.
Specifications are subject to change without notice. J2612USL