

ER454120MHT-W



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Two Series Circuits in Parallel	Input Voltage:	120 to 277
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	Yes	Max. Case Temperature:	90°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps) @120/277V	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max. L.C.C.F.	B.E.F
F54T5HO	3	54	-20 / -29	1.52 / 0.66	182	1.00	10	0.99	1.70	0.55
	4			2.00 / 0.86	240	1.00				0.42
F54T5HO/ES (49W)	3	49		1.29 / 0.58	156	1.00				0.64
	4			1.65 / 0.74	200	1.00				0.50
F54T5HO/ES (47W)	3	47		1.29 / 0.58	156	1.00				0.64
	4			1.65 / 0.74	200	1.00				0.50
FT 55W	3	55		1.34 / 0.57	152	0.90				0.59
	4			1.74 / 0.76	204	0.89				0.44
FT 50W	3	50		1.49 / 0.46	178	1.10				0.62
	4			1.96 / 0.60	235	1.10				0.47

REGULATORY COMPLIANCE


- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant




PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

T5HO

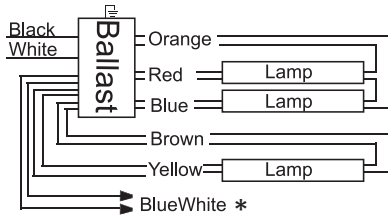

* Cap off each Blue/White wire separately

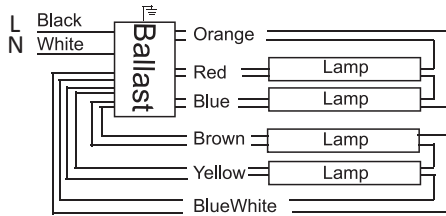


LEAD LENGTH


Wire	Black	White	Red	Orange	Blue	Brown	Blue/White	Yellow
in	18	18	30	56	30	40	48	30

WIRING DIAGRAM

BIAX / PL-L

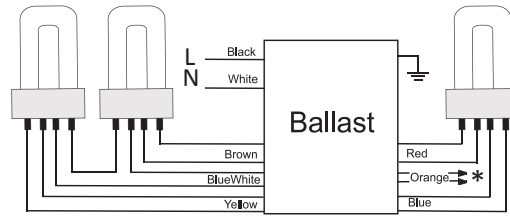


* Cap off each Blue/White wire separately

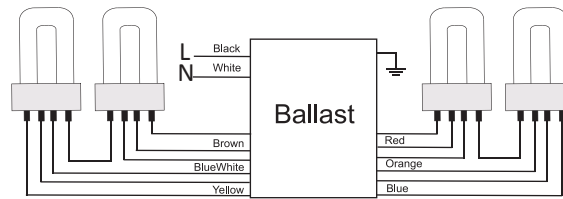

CASE DIMENSIONS

Overall (L)	17.71"	450.0 mm
Width (W)	1.72"	43.8 mm
Height (H)	1.18"	30.0 mm
Mounting (M)	17.24"	438.0 mm

HOT SPOT LOCATION

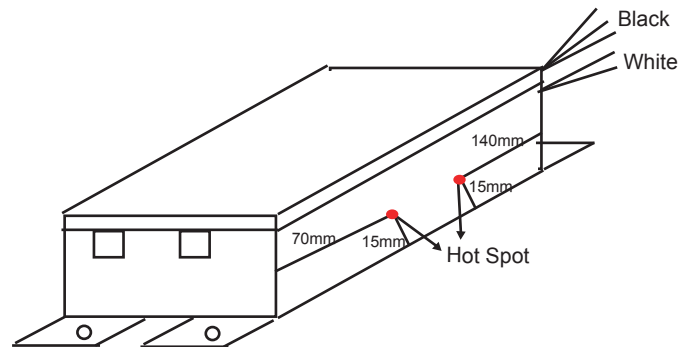

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
ER454120MHT-W	27.60 lbs	18.90" x 10.24" x 5.71"	10	500