

SPECIFICATION SHEET

SUBJECT

LED RUNNING MAN EXIT SIGN

CUSTOMER PROJECT

Project: _____
Type: _____
Cat. No.: _____
Qty: _____
Date: _____
EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

CET Series labour-saving, pictogram LED Running Man Exit Sign.



**CET SERIES
LED RUNNING MAN
EXIT SIGN**

SPECIFICATION FEATURES

Construction

Injection-moulded thermoplastic ABS housing. UL94V-0 flame rating. Suitable for wall mounting, ceiling mounting and side mounting. Housing snaps to canopy with simple twist and locking tightly secure to housing. 2 face plates, 1 back plate and 3 running man signs included

Finish

White

Compliance

CSA listed and meets all requirements in C22.2 No. 141-10

Warranty


5 years for fixture

Controls

LED Indicator light and push button test switch. LED's mounted on printed circuit board

Electrical

120/347V AC Dual Voltage. 3.6V long-life, rechargeable Ni-Cad battery. SMD 2835 LED, CCT 6000K for LED exit sign. Min. 90 minutes discharge after charge battery 24 hours. Ambient temperature -25°C to 45°C. Suitable for damp locations

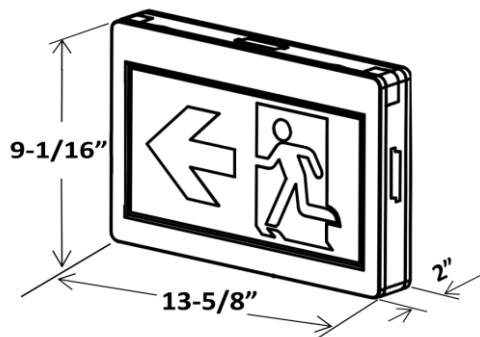

EX-CET-100

Dimensions

mm | 346(L) x 230(W) x 51(D)

inch | 13-5/8(L) x 9-1/16(W) x 2(D)



3 running man signs included



www.eelighting.ca

EELSS18W49



...continued

solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

ORDERING CODE, ENERGY AND PERFORMANCE DATA



Model No.	Battery	Voltage (V)	Hz	Charge Time	Input Watts	Discharge Time	Certification	Type
EX-CET-100 - End of Life -	Ni-cad 3.6V 600mA	120 / 347 V AC	60	24 hours	5	90 minutes		Standard

