

SPECIFICATION SHEET

SUBJECT

LED MONTE CARLO WALL SCONES

CUSTOMER PROJECT

Project: _____

Type: _____

Cat. No.: _____

Qty: _____

Date: _____

EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The Monte Carlo Outdoor Wall Scones are high performance luminaires designed to integrate naturally to wall surfaces. These modern style wall scones are IP66 rated, available in 2 sizes.

SPECIFICATION FEATURES

Construction

Heavy gauge aluminum with powdered coated paint finish
Suitable for wet locations

Electrical

Long Life LED System complete with electrical driver to deliver the optimal performance
LED's available in 4000K with a typical CRI: 80
Ambient temperature -40°C to 40°C
Rated for 94,000 hours
Electronic drivers are available in 120-277 and 347 Volt applications

Driver and Module Access

Drivers can be accessed by removing the lens cover

Mounting

Surface Mount

Finish

Heavy gauge aluminum and high gloss gray enamel paint finish ensures maximum bonding and rust inhibition

Shielding

White polycarbonate lens offers visual comfort

Compliance


Modules and Drivers are UL recognized components and indoor luminaires are cULus listed

Warranty

5 years




LED
MONTE CARLO
OUTDOOR
WALL SCONES

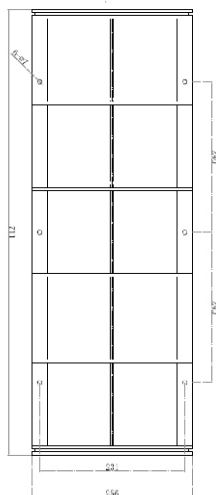

MCWS-80LED08

Dimensions

mm | 711(L) x 256(W) x 134(D)
inch | 28(L) x 10(W) x 5.3(D)

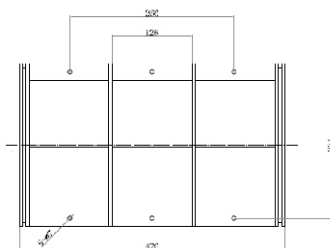

MCWS-40LED04

Dimensions

mm | 420(L) x 256(W) x 134(D)
inch | 16.5(L) x 10(W) x 5.3(D)



www.eelighting.ca

EELSS18W42



...continued

solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification	Type
	MCWS-80LED08 28" — End Of Life —	8830	83	120-277 or 347	4000K	106		Standard
	MCWS-40LED04 16" — End Of Life —	4410	42	120-277 or 347	4000K	105		Standard

NOTE:
Lumens are estimated

OPTIONAL ACCESSORIES

0-10V Dimming Driver (-D) | 120-277 or 347V
 ULT - HC419S | On-Off Sensor Control | 120-277V
 ULT - HC419V | Tri-level Dimming Control | 120-277V

SHIPPING DATA

Model No.	Weight
MCWS-80LED08	8.2kg / 18lbs
MCWS-40LED04	5.6kg / 12.4lbs