

PR432120M



Ballast Type:	Electronic	Starting Method:	Rapid Start
Lamp Connection:	Series	Input Voltage:	120 to 277
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	No	Max. Case Temperature:	70°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps) @120/277V	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max L.C.C.F.	B.E.F	
F32T8	4	32	32 / 0	0.92 / 0.40	110	0.88	10	0.99	1.70	0.80	
	3			0.79 / 0.34	94	0.89				0.95	
F32T8/ES (30W)	4	30	60 / 16	0.86 / 0.38	103	0.88				0.85	
	3			0.73 / 0.32	87	0.89				1.02	
F32T8/ES (28W)	4	28		0.86 / 0.38	96	0.88				0.92	
	3			0.69 / 0.30	82	0.89				1.09	
F32T8/ES (25W)	4	25		0.80 / 0.36	92	0.88				0.96	
	3			0.65 / 0.29	77	0.89				1.16	
F25T8	4	25		32 / 0	0.84 / 0.36	92				0.92	1.00
	3				0.66 / 0.29	78				0.93	1.19
F17T8	17	0.67 / 0.29			79	1.00				1.27	
		0.50 / 0.22			59	1.01				1.71	

REGULATORY COMPLIANCE


- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's

- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant



PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

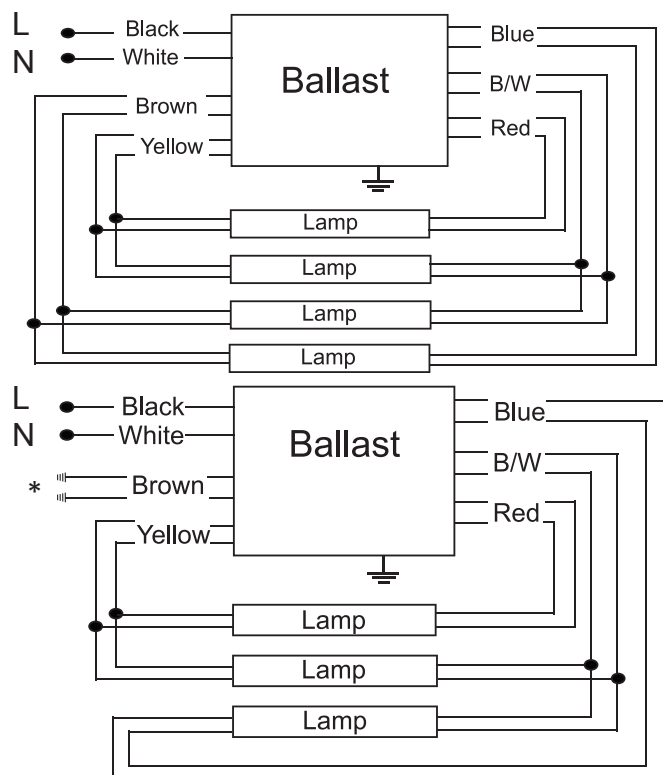

*Cap off each Brown wire separately

LEAD LENGTH

Wire	in
Black	18
White	18
Blue	31
Red	31
Yellow	46
Brown	46
Blue/White	31

CASE DIMENSIONS

Overall (L)	9.50"	241.0 mm
Width (W)	1.72"	43.8 mm
Height (H)	1.18"	30.0 mm
Mounting (M)	8.90"	226.0 mm

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
PR432120M	32.8 lbs	11.0" x 10.6" x 9.1"	20	960