

PR432347-PP-HE



Ballast Type:	Electronic	Starting Method:	Programmed Start
Lamp Connection:	Parallel	Input Voltage:	347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	No	Max. Case Temperature:	70°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max L.C.C.F.	B.E.F	
F40T8	3	40	0 / -18	0.31	108	0.93	10	0.99	1.60	0.86	
F32T8 *	4	32		0.32	111	0.88				0.79	
	3			0.26	91	0.95				1.04	
F32T8/ES (30W)	4	30	60 / 16	0.30	103	0.88				0.85	
	3			0.25	85	0.95				1.12	
F32T8/ES (28W)	4	28		0.27	95	0.88				0.93	
	3			0.23	79	0.95				1.20	
F32T8/ES (25W)	4	25		0.26	90	0.88				0.98	
	3			0.22	75	0.95				1.27	
FB32T8-U	4	32		0 / -18	0.32	111				0.88	0.79
	3				0.27	92				0.95	1.03
FB32T8-U (25W)	4	25		60 / 16	0.25	85				0.88	1.04
	3		0.21		71	0.95				1.34	
F25T8	4	25	0 / -18	0.26	87	0.89				1.02	
	3			0.21	73	0.97				1.33	
F17T8	4	17		0.18	63	0.92				1.46	
	3			0.15	53	0.98				1.85	

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's

- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant


RoHS
compliant



NEMA
Premium

PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

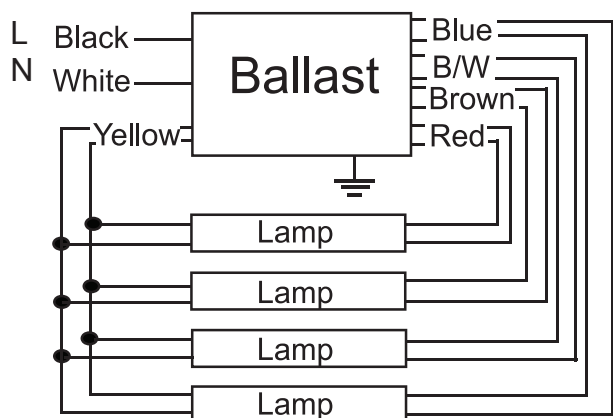


LEAD LENGTH

Wire	in
Black	20
White	20
Blue	31
Red	31
Yellow	47
Brown	33
Blue/White	33

CASE DIMENSIONS

Overall (L)	9.50"	241.0 mm
Width (W)	1.72"	43.8 mm
Height (H)	1.18"	30.0 mm
Mounting (M)	8.90"	226.0 mm

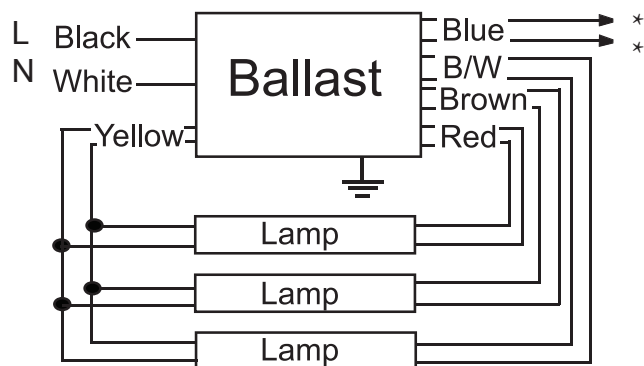

* Cap off each blue wire separately

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
PR432347-PP-HE	31.2 lbs	11.0" x 10.6" x 9.1"	20	960