

PR432347



Ballast Type:	Electronic	Starting Method:	Rapid Start
Lamp Connection:	Series	Input Voltage:	347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	No	Max. Case Temperature:	70°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max L.C.C.F.	B.E.F
F32T8	4	32	32 / 0	0.33	115	0.88	10	0.99	1.60	0.77
	3			0.28	96	0.94				0.98
F32T8/ES (30W)	4	30	60 / 16	0.31	107	0.88				0.82
	3			0.24	82	0.94				1.15
F32T8/ES (28W)	4	28		0.28	96	0.88				0.92
	3			0.23	78	0.94				1.21
F32T8/ES (25W)	4	25		0.27	92	0.88				0.96
	3			0.21	73	0.94				1.29
F25T8	4	25		32 / 0	0.27	93		0.90		0.97
	3				0.21	73		0.95		1.30
F17T8	4	17	0.21		71	0.90		1.27		
	3		0.16		55	0.95		1.73		
								0.98		

REGULATORY COMPLIANCE



- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's

- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant



PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

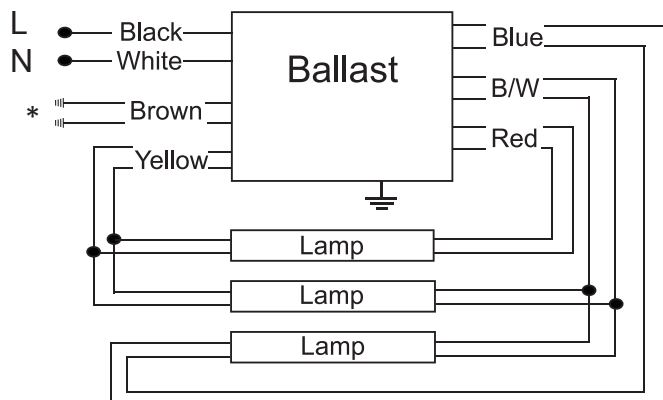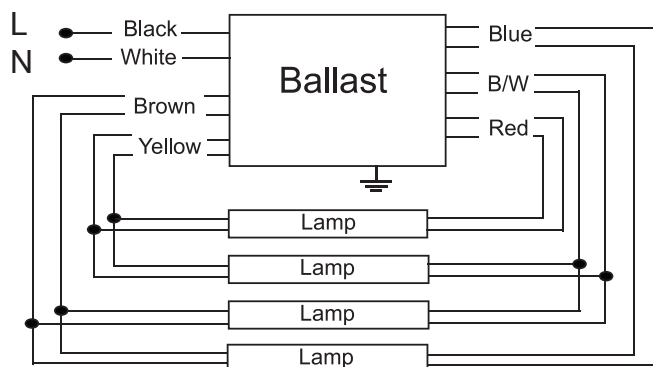

*Cap off each Brown wire separately

LEAD LENGTH

Wire	in
Black	18
White	18
Blue	31
Red	31
Yellow	46
Brown	46
Blue/White	31

CASE DIMENSIONS

Overall (L)	9.50"	241.0 mm
Width (W)	1.72"	43.8 mm
Height (H)	1.18"	30.0 mm
Mounting (M)	8.90"	226.0 mm

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
PR432347	32.8 lbs	11.0" x 10.6" x 9.1"	20	960