

UT232347



Ballast Type:	Electronic	Starting Method:	Instant Start
Lamp Connection:	Parallel	Input Voltage:	347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
EOL Protection:	No	Max Case Temperature:	70°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max L.C.C.F.	B.E.F	
F32T8	2	32	0/-18	0.17	57	0.90	10	0.99	1.70	1.58	
	1			0.11	37	1.03	15	0.98		2.78	
F32T8/ES (30W)	2	30	60/16	0.16	55	0.90	10	0.99		1.64	
	1			0.10	35	0.95	15	0.98		2.71	
F32T8/ES (28W)	2	28		0.15	52	0.90	10	0.99		1.73	
	1			0.10	33	0.95	15	0.98		2.88	
F32T8/ES (25W)	2	25		0.14	49	0.90	10	0.99		1.84	
	1			0.09	31	0.95	15	0.98		3.06	
F25T8	2	25		0/-18	0.14	48	0.91	10		0.99	1.90
	1				0.09	30	1.06	15		0.98	3.53
F17T8	2	17	0.10		33	0.93	15	0.97		2.82	
	1		0.07		22	1.07	15	0.95		4.86	

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant


RoHS
compliant



NEMA
Premium

PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

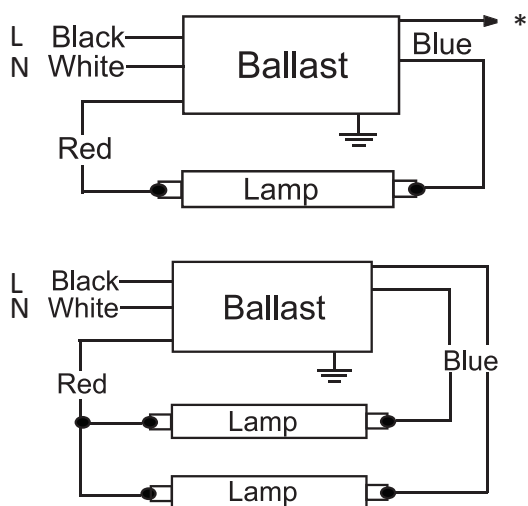

*Cap off one blue wire separately

LEAD LENGTH

Wire	in
Black	19
White	19
Blue	31
Red	47

CASE DIMENSIONS

Overall (L)	9.50"	241.0 mm
Width (W)	1.72"	43.8 mm
Height (H)	1.18"	30.0 mm
Mounting (M)	8.90"	226.0 mm

ORDERING INFORMATION

Model #	Carton Quantity	Carton Weight	Carton Dimensions LxWxH	Skid Quantity	Bulk Quantity
UT232347	20	26.4 lbs	11.0" x 10.6 x 9.1"	960	1120