

UT432347H



Ballast Type:	Electronic	Starting Method:	Instant Start
Lamp Connection:	Parallel	Input Voltage:	347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	No	Max. Case Temperature:	70°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max L.C.C.F.	B.E.F
F32T8	4	32	0 / -18	0.44	148	1.18	10	0.99	1.70	0.81
F32T8/ES (30W)		30	60 / 16	0.41	138					0.86
F32T8/ES (28W)		28		0.38	128					0.92
F32T8/ES (25W)		25		0.34	116					1.02

REGULATORY COMPLIANCE

- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)


- No PCB's
- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant

RoHS
compliant



PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

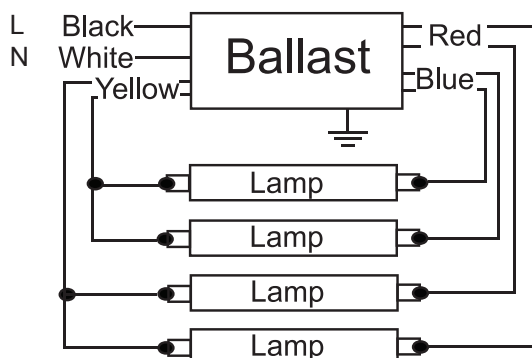

LEAD LENGTH

Wire	in
Black	18
White	18
Blue	31
Red	31
Yellow	47

CASE DIMENSIONS

Overall (L)	9.50"
Width (W)	2.41"
Height (H)	1.43"
Mounting (M)	8.90"

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
UT432347H	29.80 lbs	11.02" x 10.63" x 10.24"	20	1000