

SUBJECT SPECIFICATION SHEET**EEL-AL-DSENSOR (120-277V)****CUSTOMER PROJECT**

Project: _____
Type: _____
Cat. No.: _____
Qty: _____
Date: _____
EEL Rep: _____



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

FEATURES



- ANSI C136.10 twist-lock
- Regular on/off levels
- Surge arrester built-in
- IR-filtered phototransistor
- UV stabilized enclosure
- Zero-Cross technology inside
- Supports FCC Class A / Class C

SPECIFICATION FEATURES

Rated Voltage	120-277VAC
Rated Frequency	50/60Hz
Rated Humidity	96%
Ambient Temperature	-40°C to 70°C
Rated Loading	1000W Tungsten; 1800VA Ballast; 8A@120VAC 5A@208-277VAC e-Ballast
Operate Levels	16Lx On / 24Lx Off
Shell Material	Polycarbonate (PC) / Polypropylene (PP) Sandwich Cover
Power Consumption	0.5W Max.
IP Level	IP54 / IP65 / IP67
Warranty	5-Year Warranty

CERTIFICATIONS

EEL-AL-DSENSOR

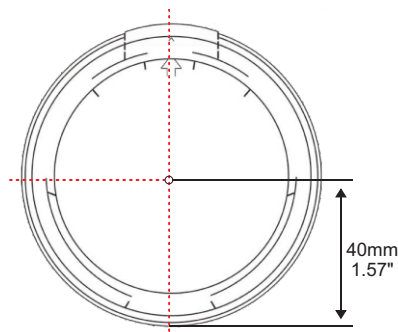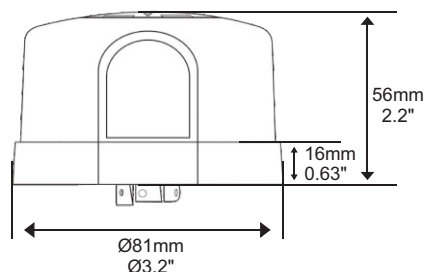

www.eelighting.ca