

SPECIFICATION SHEET

SUBJECT

LOW PROFILE CANOPY LIGHT - IP65

CUSTOMER PROJECT

Project: _____

Type: _____

Cat. No.: _____

Qty: _____

Date: _____

EEL Rep: _____



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

This LPCL series is an ultimate low profile canopy with elegant appearance. The LED Low Profile Canopy Light is ideal for parking garage application. This fixture is IP65 rated and sold as a ceiling mount only.



**LOW PROFILE CANOPY
LIGHT - IP65**

SPECIFICATION FEATURES

Construction

- Heavy duty two pieces aluminum housing

Electrical

- 120-277 Volt
- 347 Volt
- Operating Temperature -40°C to 40°C

Driver and Module Access

- Modules located under the lens and driver is mounted on the back plate inside the fixture

Finish

- Bronze composite powder-coat finish
- Rust and corrosion proof
- Suitable for extreme climate changes without cracking or peeling

Mounting

- Surface Mount

Reflectors

- PC (Polycarbonate)

Shielding


- PC Polycarbonate, clear lens

Compliance

- IP65
- cULus
- Suitable for damp locations

Warranty

- 5 year / L70 Life Greater than 50,000 hours

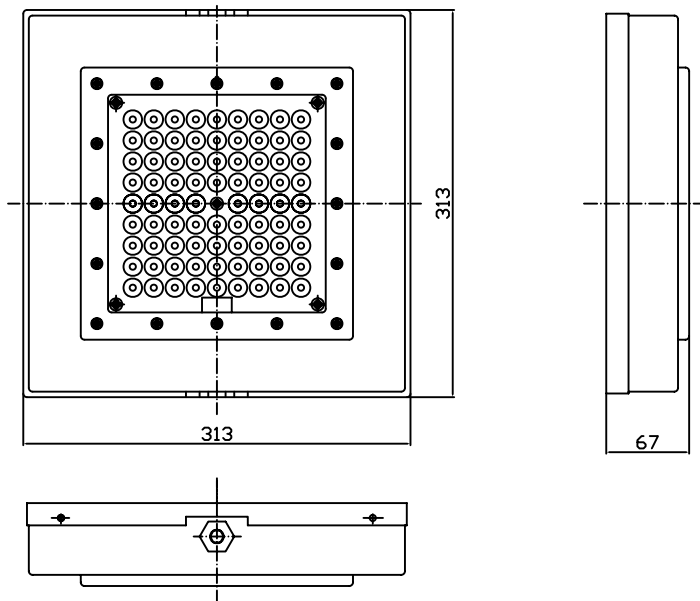

LPCL-75/LPCL-45

Dimensions

mm| 313(L) x 313(W) x 67(D)

inch| 12(L) x 12(W) x 2.7(D)

ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification
	LPCL75LED-50K - End of Life -	9774	71	120-277 or 347	5000K	137	
	LPCL-75LED-40K - End of Life -	9604	71	120-277 or 347	4000K	136	
	LPCL-45LED-50K - End of Life -	5867	47	120-277 or 347	5000K	125	
	LPCL-45LED-40K - End of Life -	5922	47	120-277 or 347	4000K	126	

***Also available in 60W. See product page: <https://www.eelighting.ca/products-led?slug=lpcl>

NOTE:

- Lumens are estimated
- DLC qualified may not apply to all versions within a model. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

EMERGENCY BACK-UP (OPTIONAL)

EMP-U1025 | LED Emergency Pack 120-277V (except LPCL-75)
EMP-U1045 | LED Emergency Pack 120-347V